



EVEKTOR – AEROTECHNIK, a.s.  
Letecká 1384  
686 04 Kunovice  
Czech Republic

Tel.: +420 572 537 111  
Fax: +420 575 537 910  
e-mail: [marketing@evektor.cz](mailto:marketing@evektor.cz)  
<http://www.evektor.cz>

# AIRCRAFT OPERATING INSTRUCTIONS FOR SPORTSTAR LIGHT SPORT AIRCRAFT

Serial number:

Registration mark:

Document number: S2006AOIUS

Date of issue: January 15, 2006

This manual must be on the airplane board during operation. This manual contains information which must be provided to the pilot and also contains supplementary information provided by the airplane manufacturer – Evektor – Aerotechnik a.s.

**This aircraft must be operated in compliance with the information and limitations stated in this manual.**



## 0. TECHNICAL INFORMATION

### 0.1 Log of Revisions

All revisions or supplements to this manual, except actual weighing data, are issued in form of revisions, which will have new or changed pages as appendix and the list of which is shown in the Log of Revisions table.

The new or changed text in the revised pages will be marked by means of black vertical line on the margin of page and the revision number and date will be shown on the bottom margin of page.

Rev. No.	Affected Section	Affected Pages	Date	Approved	Date	Date of insertion	Sign.
1	0, 1, 2, 5, 7,	0-1, 0-3, 0-4, 1-3, 1-5, 2-5 5-3 7-7	April 24, 2006	Javorsky	April 24, 2006		

**Section 0**

Technical  
Information



**AIRCRAFT OPERATING INSTRUCTIONS**



Doc. No. S2006AOIUS

Rev. No.	Affected Section	Affected Pages	Date	Approved	Date	Date of insertion	Signature



### 0.2 List of Effective Pages

Section	Page	Date	Section	Page	Date	
0	0-1	April 24, 2006		3-4	January 15, 2006	
	0-2	January 15, 2006		3-5	January 15, 2006	
	0-3	April 24, 2006		3-6	January 15, 2006	
	0-4	April 24, 2006		3-7	January 15, 2006	
	0-5	January 15, 2006		3-8	January 15, 2006	
	0-6	January 15, 2006		3-9	January 15, 2006	
1	1-1	January 15, 2006		3-10	January 15, 2006	
	1-2	January 15, 2006		4	4-1	January 15, 2006
	1-3	April 24, 2006			4-2	January 15, 2006
	1-4	January 15, 2006			4-3	January 15, 2006
	1-5	April 24, 2006	4-4		January 15, 2006	
	1-6	January 15, 2006	4-5		January 15, 2006	
	1-7	January 15, 2006	4-6		January 15, 2006	
	1-8	January 15, 2006	4-7		January 15, 2006	
2	2-1	January 15, 2006	4-8		January 15, 2006	
	2-2	January 15, 2006	4-9		January 15, 2006	
	2-3	January 15, 2006	4-10		January 15, 2006	
	2-4	January 15, 2006	4-11		January 15, 2006	
	2-5	April 24, 2006	4-12		January 15, 2006	
	2-6	January 15, 2006	4-13		January 15, 2006	
	2-7	January 15, 2006	4-14		January 15, 2006	
	2-8	January 15, 2006	5	5-1	January 15, 2006	
	2-9	January 15, 2006		5-2	January 15, 2006	
	2-10	January 15, 2006		5-3	April 24, 2006	
	2-11	January 15, 2006		5-4	January 15, 2006	
	2-12	January 15, 2006		5-5	January 15, 2006	
3	3-1	January 15, 2006		5-6	January 15, 2006	
	3-2	January 15, 2006		5-7	January 15, 2006	
	3-3	January 15, 2006		5-8	January 15, 2006	

**Section 0**Technical  
Information**SPORTSTAR****AIRCRAFT OPERATING INSTRUCTIONS**

Doc. No. S2006AOIUS

Section	Page	Date	Section	Page	Date
	5-9	January 15, 2006	8	8-1	January 15, 2006
	5-10	January 15, 2006		8-2	January 15, 2006
	5-11	January 15, 2006		8-3	January 15, 2006
	5-12	January 15, 2006		8-4	January 15, 2006
	5-13	January 15, 2006		8-5	January 15, 2006
	5-14	January 15, 2006		8-6	January 15, 2006
	5-15	January 15, 2006		8-7	January 15, 2006
					8-8
6	6-1	January 15, 2006	9	9-1	January 15, 2006
	6-2	January 15, 2006		9-2	January 15, 2006
	6-3	January 15, 2006		9-3	January 15, 2006
	6-4	January 15, 2006		9-4	January 15, 2006
	6-5	January 15, 2006			
	6-6	January 15, 2006			
	6-7	January 15, 2006			
	6-8	January 15, 2006			
7	7-1	January 15, 2006			
	7-2	January 15, 2006			
	7-3	January 15, 2006			
	7-4	January 15, 2006			
	7-5	January 15, 2006			
	7-6	January 15, 2006			
	7-7	April 24, 2006			
	7-8	January 15, 2006			
	7-9	January 15, 2006			
	7-10	January 15, 2006			
	7-11	January 15, 2006			
	7-12	January 15, 2006			
	7-13	January 15, 2006			
	7-14	January 15, 2006			
	7-15	January 15, 2006			



### **0.3 Table of Contents**

	Section
General	<b>1</b>
Limitations	<b>2</b>
Emergency procedures	<b>3</b>
Normal procedures	<b>4</b>
Performance	<b>5</b>
Weight and balance	<b>6</b>
Airplane and system description	<b>7</b>
Airplane handling, servicing and maintenance	<b>8</b>
Supplements	<b>9</b>

**Section 0**

*Technical  
Information*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

Intentionally left blank



## **CONTENTS**

### **1. GENERAL**

<b>1.1 Introduction</b> .....	<b>1-3</b>
<b>1.2 Certification basis</b> .....	<b>1-3</b>
1.2.1 Data location .....	1-3
<b>1.3 Warnings, cautions, notes</b> .....	<b>1-4</b>
<b>1.4 Descriptive data</b> .....	<b>1-5</b>
1.4.1 Airplane description .....	1-5
1.4.2 Powerplant .....	1-5
1.4.3 Main technical data .....	1-5
1.4.4 Three-view drawing .....	1-6
<b>1.5 Definitions and abbreviations</b> .....	<b>1-7</b>

**Section 1**

*General*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

---

Intentionally left blank



## 1.1 Introduction

### **PARTICIPANT'S RESPONSIBILITY**

There are inherent risks in participating in aviation activities, these risks are significant, up to and potentially including death. Operators and passengers of recreational aviation aircraft, by participation, accept the risks inherent in such participation of which the ordinary prudent person is or should be aware. Pilots and passengers have a duty to exercise good judgment and act in a responsible manner while using the aircraft and to obey all oral or written warnings, or both, prior to and/or during use of the aircraft.

This Flight manual has been prepared to provide pilots and instructors with information for safe and efficient operation of the SPORTSTAR airplane. It also contains supplementary information considered to be important by the airplane manufacturer.

## 1.2 Certification basis

The aircraft described herein complies with the Standard Specification for Design and Performance of a Light Sport Airplane, Designation F 2245–04, issued by ASTM International Committee F37.

This type of aircraft complies with the Czech UL–2 airworthiness requirements, it has been type certified by the Light Aircraft Association of the Czech Republic and the type certificate ULL 07/2003 was issued in December 18th, 2003.

### 1.2.1 Data location

The certification documentation is available from the US General importer or airplane manufacturer on a request of competent aviation authority and/or Designated Airworthiness Representative.

Contact address:

US General Importer:  
Sport Aircraft International LLC  
804 Water Street  
Kerrville, Texas 78028  
phone.: 001 830 896 8910  
fax: 001 830 896 8913  
e–mail: sportac@ktc.com

Airplane Manufacturer:  
Evektor – Aerotechnik, a.s.  
Letecká 1384  
686 04 Kunovice  
Czech Republic  
tel.: +420 572 537 111  
fax: +420 572 537 900  
e–mail: marketing@evektor.cz



**1.3 Warnings, cautions, notes**

The following informations apply to warnings, cautions and notes used in the Flight manual:

**WARNING**

**MEANS THAT NON-OBSERVATIONS OF THE CORRESPONDING PROCEDURE LEADS TO AN IMMEDIATE OR IMPORTANT DEGRADATION OF THE FLIGHT SAFETY.**

**CAUTION**

MEANS THAT NON-OBSERVATIONS OF THE CORRESPONDING PROCEDURE LEADS TO A MINOR OR TO A MORE OR LESS LONG TERM DEGRADATION OF THE FLIGHT SAFETY.

**NOTE**

Draws the attention to any special item not directly related to safety but which is important or unusual.



**1.4 Descriptive data**

**1.4.1 Airplane description**

SPORTSTAR airplane is an all-metal low-wing of semimonocoque structure with two side by side seats and nose wheel landing gear

For further description see Section 7 – Airplane and system description.

**1.4.2 Powerplant**

The standard powerplant consists of ROTAX 912 (80 hp) engine (100 hp optionally) and WOODCOMP KLASSIC 170/3/R propeller.

For further description see Section 7 – Airplane and system description.

For concrete engine and propeller type – see Section 9 – Supplements – Airplane description.

**1.4.3 Main technical data**

**Wing**

Span .....	28.37 ft	8.646 m
Area .....	112.7 sq.ft	10.47 sq.m
MAC depth .....	4.1 ft	1.25 m
Wing loading .....	10.76 lbs/sq.ft	52.53 kg/sq.m
Aileron – area .....	2.62 sq.ft	0.25 sq.m
Flap – area .....	5.60 sq.ft	0.52 sq.m

**Fuselage**

length .....	19.62 ft	5.980 m
width .....	3.55 ft	1.082 m
height .....	7.66 ft	2.335 m
cockpit canopy max. width .....	3.87 ft	1.180 m

**Horizontal tail unit**

Span .....	8.20 ft	2.50 m
HTU Area .....	20.88 sq.ft	1.94 sq.m
Elevator area .....	8.40 sq.ft	0.78 sq.m

**Vertical tail unit**


Height .....	4.07 ft	1.24 m
VTU Area .....	10.76 sq.ft	1.00 sq.m
Rudder area .....	4.31 sq.ft	0.40 sq.m

**Landing gear**

Wheel track .....	6.12 ft	1.865 m
Wheel base .....	4.43 ft	1.350 m
Main and nose landing gear wheel diameter .....	14 in	350 mm



1.4.4 Three-view drawing

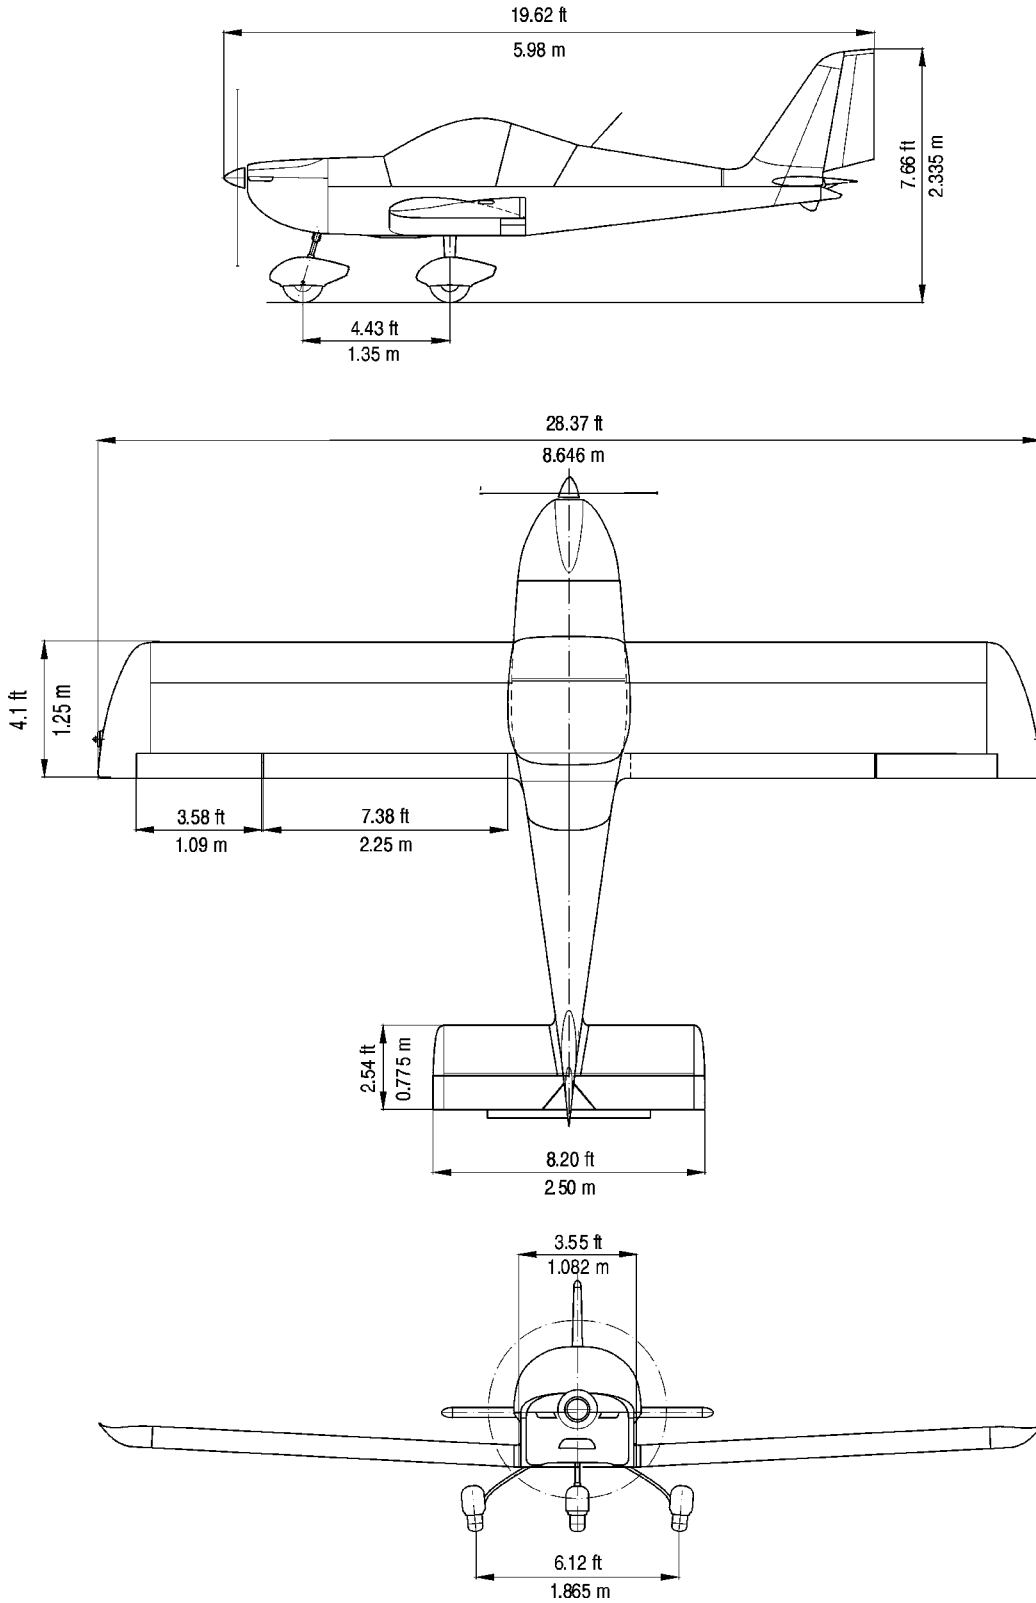

**Figure 1-1**



## 1.5 Definitions and abbreviations

### NOTE

The abbreviations on placards in the airplane cockpit, are printed in **BOLD CAPITAL LETTERS** in the text of this Flight manual.

ACCU	accumulator
ALT ENC	encoding altimeter
ATC	air traffic control
bar	bar 1 bar = 100 kPa
BEACON	anti-collision beacon
°C	Celsius degree
CAS	calibrated airspeed
CLOCK	aircraft clock
ft	foot 1 ft = 0.305 m
GPS	global positioning system
HTU	horizontal tail unit
IAS	indicated airspeed
IC	intercom
IFR	instrument flight rules
ISA	international standard atmosphere
kg	kilogram
KIAS	indicated air speed in knots
KCAS	calibrated airspeed in knots
mph	mile per hour
mph CAS	calibrated airspeed in miles per hour
km/h CAS	calibrated airspeed in km/h
kts	knots 1 kt = 1.852 km/h
litres	litre
lbs	pounds 1 lb = 0.45 kg
m	meter
MAC	mean aerodynamical chord
max.	maximum
min.	minimum or minute
mm	millimeter
m/s	meter per second
OAT	outside air temperature
OFF	system is switched off or control element is in off-position
ON	system is switched on or control element is in on-position
Pa	pascal 1Pa = 1N/m <sup>2</sup>



PSI	pound per sq.in (1PSI = 6.89 kPa)
RPM	revolutions per minute
RWY	runway
sq.ft	foot squared
sq.m	meter squared
V <sub>A</sub>	manoeuvring airspeed
V <sub>FE</sub>	maximum flap extended speed – flaps in 50° position
VFR	visibility flight rules
V <sub>LOF</sub>	airplane lift–off speed
V–METER	voltmeter
V <sub>NE</sub>	never exceed speed
V <sub>NO</sub>	maximum structural cruising speed
V <sub>SO</sub>	stall speed with wing flaps in 50° position
V <sub>S1</sub>	stall speed with wing flaps in 0° position
VTU	vertical tail unit
V <sub>X</sub>	best angle–of–climb speed
V <sub>Y</sub>	best rate–of–climb speed
XPDR	transponder



## **CONTENTS**

### **2. LIMITATIONS**

<b>2.1 Introduction</b> .....	<b>2-3</b>
<b>2.2 Airspeed</b> .....	<b>2-3</b>
<b>2.3 Airspeed indicator marking</b> .....	<b>2-3</b>
<b>2.4 Powerplant</b> .....	<b>2-4</b>
<b>2.5 Powerplant instrument marking</b> .....	<b>2-5</b>
<b>2.6 Miscellaneous instrument marking</b> .....	<b>2-5</b>
<b>2.7 Weight</b> .....	<b>2-5</b>
<b>2.8 Centre of gravity</b> .....	<b>2-6</b>
<b>2.9 Approved manoeuvres</b> .....	<b>2-6</b>
<b>2.10 Manoeuvring load factors</b> .....	<b>2-6</b>
<b>2.11 Flight crew</b> .....	<b>2-6</b>
<b>2.12 Kinds of operation</b> .....	<b>2-7</b>
<b>2.13 Fuel</b> .....	<b>2-8</b>
<b>2.14 Oil</b> .....	<b>2-8</b>
<b>2.15 Maximum number of passengers</b> .....	<b>2-8</b>
<b>2.16 Other limitations</b> .....	<b>2-9</b>
<b>2.17 Limitation placards</b> .....	<b>2-10</b>

**Section 2**

*Limitations*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**

Doc. No. S2006AOIUS

---

Intentionally left blank



## 2.1 Introduction

Section 2 contains operation limitation, instrument marking and basic placards necessary for safe operation of airplane and its engine, standard systems and equipment.

Limitation for optional systems and equipment are stated in section 9 – Supplements.

## 2.2 Airspeed

Airspeed limitations and their meaning for operation are stated in the table below:

	Speed	KIAS	mph IAS	Meaning
V <sub>NE</sub>	Never exceed speed	146	168	Do not exceed this speed in any operation.
V <sub>NO</sub>	Maximum structural cruising speed	103	118	Do not exceed this speed, with exception of flight in smooth air, and even then only with increased caution.
V <sub>A</sub>	Manoeuvring speed	86	99	Do not make full or abrupt control movement above this speed, because under certain conditions the aircraft may be overstressed by full control movement.
V <sub>FE</sub>	Maximum flap extended speed	70	81	Do not exceed this speed with the given flap setting.

## 2.3 Airspeed indicator marking

Airspeed indicator markings and their colour–code significance are shown in the table below:

Marking	Range		Meaning
	KIAS	mph IAS	
Red line	37	43	V <sub>S0</sub> at maximum weight (flaps in landing position 50°)
White arc	37 – 70	43 – 81	Operating range with extended flaps. Lower limit– V <sub>S0</sub> at maximum weight (flaps 50°) Upper limit – V <sub>FE</sub>

Marking	Range		Meaning
	KIAS	mph IAS	
Green arc	42 – 103	49 – 118	Normal operation range Lower limit – $V_{S1}$ at maximum weight (flaps $0^\circ$ ) Upper limit – $V_{NO}$
Yellow arc	103 – 146	118 – 168	Manoeuvres must be conducted with caution and only in smooth air
Red line	146	168	Maximum speed for all operations – $V_{NE}$

## 2.4 Powerplant

<b>Engine manufacturer:</b>	Bombardier – Rotax GMBH		
<b>Engine type:</b>	ROTAX 912 UL or S		
<b>Power:</b>	maximum take-off	80 HP or 100 HP	
	maximum continuous	78 HP or 93.8 HP	
<b>Engine speed:</b>	maximum take-off	5800 RPM max. 5 minutes	
	maximum continuous	5500 RPM	
	idle	1400 RPM	
<b>Cylinder head temperature:</b>	maximum	135 °C	275 °F
<b>Oil temperature:</b>	maximum	150 or 130 °C / 302 or 266 °F	
	optimum operation	90 – 110 °C 190 – 230 °F	
<b>Oil pressure:</b>	maximum	7 bar	102 PSI
	minimum	0.8 bar	12 PSI
	optimum operation	2 – 5 bar	29 – 73 PSI
<b>Fuel pressure:</b>	minimum	0.15 bar	2.2 PSI
<b>Fuel grades:</b>	see 2.13, page 2–8		
<b>Oil grades:</b>	see 2.14, page 2–8		
<b>Reducer gear ratio:</b>	2.43 : 1		
<b>Propeller manufacturer:</b>	WOODCOMP s.r.o.		
<b>Propeller type:</b>	KLASSIC 170/3/R		
	3 blade, composite, on-ground adjustable		
<b>Propeller diameter:</b>	68 in	1700 mm	
<b>Maximum prop speed:</b>	2600 RPM		

### NOTE

If installed a different propeller type – see section 9 – Supplements for propeller limitations.



## 2.5 Powerplant instrument marking

The colour–code of instruments is shown in the following table:

Instrument	Units	Red line	Green arc	Yellow arc	Red line
		Lower limit	Normal operation range	Caution range	Upper limit
RPM indicator	RPM	–	1400 ÷ 5500	5500 ÷ 5800	5800
Oil temperature indicator ROTAX 912 UL / ROTAX 912 ULS	°C	–	90 ÷ 110	50 – 90 110 – 140	140
				50 ÷ 90 110 ÷ 130	130
Oil temperature indicator ROTAX 912 UL / ROTAX 912 ULS	°F	–	190 ÷ 230	120 ÷ 190 230 ÷ 284	284
				120 ÷ 190 230 ÷ 266	266
Oil pressure indicator	bar	0.8	2 ÷ 5	0.8 ÷ 2 5 ÷ 7	7
	PSI	12	29 ÷ 73	12 ÷ 29 73 ÷ 102	102
temperature ROTAX 912 UL / temperature ROTAX 912 UL /	°C	–	–	–	150 / 135
	°F	–	–	–	302 / 275

## 2.6 Miscellaneous instrument marking

There are not other instruments with colour marking.

## 2.7 Weight

Empty weight (standard equipment) . . . . .	695 lbs ± 2 %	315 kg ± 2 %
Maximum take–off weight . . . . .	1213 lbs	550 kg
Maximum landing weight . . . . .	1213 lbs	550 kg
Maximum weight in baggage compartment . . . . .	55 lbs	25 kg

**WARNING**

**DO NOT EXCEED MAXIMUM WEIGHTS! THEIR EXCEEDING LEADS TO AIRPLANE OVERLOADING AND TO DEGRADATION OF FLIGHT CHARACTERISTICS AND DETERIORATION OF MANOEUVRABILITY.**

**2.8 Centre of gravity**

Empty airplane C.G. position (standard equipment) ..... 20 ± 2 %MAC

Operating C.G. range ..... 20 to 34 %MAC

Reference datum is the wing leading edge.

**2.9 Approved manoeuvres**

SPORTSTAR airplane is approved to perform the following manoeuvres:

- steep turns up to bank angle of 60°
- climbing turns
- lazy eights
- stalls (except for steep stalls)
- normal flight manoeuvres

**WARNING**

**AEROBATICS AS WELL AS INTENTIONAL SPINS  
ARE PROHIBITED !**

**2.10 Manoeuvring load factors**

Maximum positive load factor ..... 4.0

Maximum negative load factor ..... -2.0

**2.11 Flight crew**

Minimum crew ..... 1 pilot

Minimum weight of crew ..... 121 lbs      55 kg

Maximum weight of crew ..... acc. to point 6.3

**WARNING**

**DO NOT EXCEED MAXIMUM WEIGHTS! THEIR EX-  
CEEDING LEADS TO AIRPLANE OVERLOADING AND  
TO DEGRADATION OF FLIGHT CHARACTERISTICS  
AND DETERIORATION OF MANOEUVRABILITY.**



## 2.12 Kinds of operation

The airplane is standardly approved for VFR daylight flights.

### **WARNING**

**NIGHT FLIGHTS ACCORDING TO VFR, FLIGHTS ACCORDING TO IFR (BY INSTRUMENTS) ARE APPROVED ONLY WHEN INSTRUMENTATION REQUIRED FOR SUCH FLIGHTS IS INSTALLED AND FLIGHT PERFORMED BY A PILOT WITH APPROPRIATE RATING! INTENTIONAL FLIGHTS UNDER ICING CONDITIONS ARE PROHIBITED.**

Instruments and equipment for daylight flights according to VFR :

- 1 Airspeed indicator (the colour marking according to par. 2.3)
- 1 Sensitive barometric altimeter
- 1 Magnetic compass
- 1 Fuel gauge indicator
- 1 Oil temperature indicator
- 1 Oil pressure indicator
- 1 Cylinder head temperature indicator
- 1 Engine speed indicator
- 1 Safety harness for every used seat

### **CAUTION**

**ADDITIONAL EQUIPMENT NECESSARY FOR AIRPLANE OPERATION IS GIVEN IN APPROPRIATE OPERATION REGULATION OF AIRPLANE OPERATOR'S COUNTRY.**

2.13 Fuel

Fuel tank volume (each) .....	15.85 U.S. gallons	60 litres
Total	31.7 U.S. gallons	120 litres
Usable fuel .....	31.2 U.S. gallons	118 litres
Unusable fuel .....	0.5 U.S. gallons	2.0 litres
	(0.25 US gal / 1 liter per tank)	

NOTE

It is not recommended to fully tank the fuel tanks. Due to fuel thermal expansion keep about 2.11U.S. gallons (8.0 litres) of free space in the tank to prevent fuel bleed through the vents in the wing tips thus preventing environmental contamination. This should be adhered especially when cold fuel from an underground tank is tanked.

Approved fuel grades:

- automotive petrol with min RON 95
- EN 228 Premium
- EN 228 Premium plus
- AVGAS 100 LL

Due to higher lead content in AVGAS, the wear of valve seats and deposits in the combustion chamber and lead sediments in the lubrication system will increase. Therefore, use AVGAS only if you encounter problem with vapour lock or if the other fuel types are not available

For other suitable fuel types refer to the engine Operator's Manual

NOTE

Use only fuel suitable for the respective climatic zone. Risk of vapour formation if using winter fuel for summer operation.

2.14 Oil

Performance classification SF, SG according to API

Oil volume:

- minimum ..... 0.53 U.S. gallons 2.0 litres
- maximum ..... 0.79 U.S. gallons 3.0 litres

2.15 Maximum number of passengers

Maximum number of passengers including pilot . 2



**2.16 Other limitations**

SMOKING IS PROHIBITED on the airplane board.

**PASSENGER NOTICE**


This aircraft conforms to ASTM Consensus Standards of airworthiness developed and maintained by the aviation community under ASTM Technical Committee F37.

**PASSENGER WARNING !**

This aircraft was manufactured in accordance with Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.

**2.17 Limitation placards**


The following placard is located on the instrument panel:



**PASSENGER NOTICE**  
**THIS AIRCRAFT CONFORMS TO ASTM CONSENSUS STANDARDS**  
**OF AIRWORTHINESS DEVELOPED AND MAINTAINED BY THE AVIATION**  
**COMMUNITY UNDER ASTM TECHNICAL COMMITTEE F37.**

**PASSENGER WARNING !**  
**THIS AIRCRAFT WAS MANUFACTURED IN ACCORDANCE WITH**  
**LIGHT SPORT AIRCRAFT AIRWORTHINESS STANDARDS**  
**AND DOES NOT CONFORM TO STANDARD CATEGORY**  
**AIRWORTHINESS REQUIREMENTS.**

The following placard is located in the baggage compartment:





# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS

Doc. No. S2006AOIUS

The following placards are located on the tilting canopy:

This airplane has been approved only for VFR day flights under no icing conditions.	
Aerobatics and intentional spins are prohibited!	
<b>AIRSPPEED IAS</b>	
Never exceed	146 kts
Manoeuvring	86 kts
Max. Flap Extended	70 kts
Stalling	37 kts
<b>ENGINE SPEED</b>	
Max. Take-off (max. 5 min.)	5800 rpm
Max. Continuous	5500 rpm
Idling	1400 rpm
Unusable quantity of fuel 0.5 U.S. gallons (2.0 litres)	

OR

This airplane has been approved only for VFR day flights under no icing conditions.	
Aerobatics and intentional spins are prohibited!	
<b>AIRSPPEED IAS</b>	
Never exceed	168 mph
Manoeuvring	99 mph
Max. Flap Extended	81 mph
Stalling	43 mph
<b>ENGINE SPEED</b>	
Max. Take-off (max. 5 min.)	5800 rpm
Max. Continuous	5500 rpm
Idling	1400 rpm
Unusable quantity of fuel 0.5 U.S. gallons (2.0 litres)	

OR

LOAD LIMITS						
Max. take-off weight		1213 lbs				
Empty weight		694 lbs				
Max. baggage weight		50 lbs				
PERMITTED CREW WEIGHT						[lbs]
	Fuel quantity U.S.gal.	31,7	26,4	19,8	13,2	6,6
Baggage weight	max. 55 lbs	272	304	344	384	423
	1/2 26 lbs	301	333	373	412	452
	No baggage	328	359	399	439	478
Fuel reserve (1/8 on the fuel indicator)						2.1 U.S. gallons

LOAD LIMITS						
Max. take-off weight		550 kg				
Empty weight		315 kg				
Max. baggage weight		25 kg				
PERMITTED CREW WEIGHT						[kg]
	Fuel quantity ltr.	120	100	75	50	25
Baggage weight	max. 25 kg	124	138	156	174	192
	1/2 12 kg	137	151	169	187	205
	No baggage	149	163	181	199	217
Fuel reserve (1/8 on the fuel indicator)						8 litres

### NOTE

The values stated on the placard "LOAD LIMITS" are valid for the empty weight of the airplane with standard equipment. The placard with values valid for the actual empty weight of the airplane will be placed in the cockpit.

Other placards and labels are shown in Aircraft Maintenance and Inspection Procedures.

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**

---

Doc. No. S2006AOIUS

---

Intentionally left blank



## **CONTENTS**

### **3. EMERGENCY PROCEDURES**

<b>3.1 Introduction</b> .....	<b>3-3</b>
<b>3.2 Speeds for performing emergency procedures</b> .....	<b>3-3</b>
<b>3.3 Engine failure</b> .....	<b>3-3</b>
3.3.1 Engine failure at take-off run .....	3-3
3.3.2 Engine failure at take-off .....	3-3
3.3.3 Engine failure at flight .....	3-4
<b>3.4 Engine starting at flight</b> .....	<b>3-4</b>
<b>3.5 Engine fire</b> .....	<b>3-5</b>
3.5.1 Fire on the ground .....	3-5
3.5.2 Fire during take-off .....	3-5
3.5.3 Fire at flight .....	3-6
<b>3.6 Fire in the cockpit (if manual extinguisher available aboard)</b> .....	<b>3-7</b>
<b>3.7 Gliding flight</b> .....	<b>3-7</b>
<b>3.8 Emergency landing</b> .....	<b>3-8</b>
3.8.1 Emergency landing – with non-operating engine .....	3-8
3.8.2 Safety landing– with engine operating .....	3-8
3.8.3 Landing with burst tire .....	3-9
3.8.4 Landing with damaged landing gear .....	3-9
<b>3.9 Unintentional spin recovery</b> .....	<b>3-9</b>
<b>3.10 Other emergency procedures</b> .....	<b>3-10</b>
3.10.1 Vibration .....	3-10
3.10.2 Carburettor icing .....	3-10

**Section 3**

*Emergency  
Procedures*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

Intentionally left blank



### 3.1 Introduction

Section 3 describes operations and procedures for emergency situation solutions that could possibly occur during airplane operation.

### 3.2 Speeds for performing emergency procedures

Airspeed for the best gliding ratio (flaps retracted) 57 KIAS (66 mph IAS)

Precautionary landing

(engine running, flaps in landing position – 50°) 52 KIAS (60 mph IAS)

Emergency landing

(engine stopped, flaps in landing position – 50°) 52 KIAS (60 mph IAS)

### 3.3 Engine failure

#### 3.3.1 Engine failure at take–off run

1. **THROTTLE** lever ..... idle
2. Brakes ..... as necessary
3. **FUEL SELECTOR** ..... **OFF**
4. Ignition ..... **OFF**
5. **MASTER SWITCH** ..... **OFF**

#### 3.3.2 Engine failure at take–off

1. Gliding speed:
  - with flaps in take–off position (15°) ..... min. 52 KIAS (60 mph IAS)
  - with flaps retracted (0°) ..... min. 57 KIAS (66 mph IAS)
2. Altitude:
  - Land in take–off direction if below 150 ft:
  - Land in take–off direction or you can perform turn up to 90° if altitude is 150 – 400 ft:
  - You can try start engine if altitude is above 250 ft
  - You can perform turn up to 180° if altitude is above 400 ft:
3. **THROTTLE** lever ..... idle
4. Flaps ..... as needed
5. **FUEL SELECTOR** ..... **OFF**
6. Ignition ..... **OFF**
7. ATC ..... report



- 8. **MASTER SWITCH** ..... **OFF**
- 9. After touch down ..... brake as needed

**3.3.3 Engine failure in flight**

- 1. Gliding speed ..... 57 KIAS (66 mph IAS)
- 2. Altitude ..... take a decision and carry out:
  - Engine starting in flight – paragraph 3.4, page 3–4
  - Emergency landing – paragraph 3.8.1, page 3–8

**3.4 Engine starting at flight**

**NOTE**

It is possible to start the engine by means of the starter within the whole range of operation speeds as well as flight altitudes. The engine started up immediately after switching the ignition to **START** position.

If the engine is shut down, the altitude loss during engine starting can reach up to 1000 ft.

- 1. Gliding speed ..... 57 KIAS (66 mph IAS)
- 2. Altitude ..... check
- 3. **MASTER SWITCH** ..... **ON**
- 4. Unnecessary electrical equipment ..... switch off
- 5. **FUEL SELECTOR** ..... **LEFT**
- 6. Choke ..... as needed
- 7. **THROTTLE** lever ..... idle (choke opened) or increased idle (choke closed)

**The propeller is rotating:**

- 8. Ignition ..... **BOTH**

**The propeller is not rotating:**

- 9. Ignition ..... **START**
- 10. If engine starting does not occur, increase gliding speed up to 108 KIAS (124 mph IAS) (see NOTE), so that air–flow turns the propeller and engine will start.
- 11. Ignition ..... **BOTH**
- 12. If engine starting is unsuccessful, then continue according to paragraph 3.8.1 Emergency landing.



### 3.5 Engine fire

#### 3.5.1 Fire on the ground

1. **FUEL SELECTOR** ..... **OFF**
2. Brakes ..... brake
3. **THROTTLE** lever ..... full
4. **HOT AIR** knob (if installed) ..... push

After the engine stops:

5. Ignition ..... **OFF**
6. **MASTER SWITCH** ..... **OFF**
7. Airplane ..... leave
8. Manual extinguisher (if available) ..... use

#### 3.5.2 Fire during take-off

1. **FUEL SELECTOR** ..... **OFF**
2. **THROTTLE** lever ..... full
3. Airspeed ..... 62 KIAS (71 mph IAS)
4. **HOT AIR** knob (if installed) ..... push

After the engine stops:

5. Gliding speed ..... 52 KIAS (60 mph IAS)
6. Ignition ..... **OFF**
7. **MASTER SWITCH** ..... **OFF**
8. Land
9. Airplane ..... leave
10. Manual extinguisher (if available) ..... use



3.5.3 Fire in flight

- 1. **FUEL SELECTOR** ..... **OFF**
- 2. **THROTTLE** lever ..... full
- 3. **HOT AIR** knob (if installed) ..... close
- 4. Gliding speed ..... 57 KIAS (66 mph IAS)
- 5. Ignition ..... **OFF**
- 6. ATC ..... report if possible
- 7. **MASTER SWITCH** ..... **OFF**

**NOTE**

For extinguishing the engine fire, you can perform slip under assumption that you have sufficient altitude and time.

**WARNING**

**AFTER EXTINGUISHING THE ENGINE FIRE START ENGINE ONLY IF IT NECESSARY TO SAFE LANDING. FUEL LEAK IN ENGINE COMPARTMENT COULD CAUSE FIRE AND FIRE COULD RESTORE AGAIN.**

- 8. If you start engine again, switch off all switches, switch on the **MASTER SWITCH**, and then subsequently switch on only equipment necessary to safe landing.
- 9. Emergency landing ..... carry out according to paragraph 3.8.1
- 10. Airplaine ..... leave
- 11. Manual extinguisher (if available) ..... use as needed



**3.6 Fire in the cockpit (if manual extinguisher available aboard)**

1. Fire source ..... identify
2. **MASTER SWITCH** in case that the source of fire is electrical equipment. .... **OFF**
3. Manual extinguisher ..... use
4. After fire extinguishing ..... aerate the cockpit
5. Carry out safety landing according to 3.8.2

**WARNING**

**NEVER AGAIN SWITCH THE DEFECTIVE SYSTEM.**

**NOTE**

If a defective electrical system circuit was detected as the fire source, then switch off appropriate circuit breaker and switch over **MASTER SWITCH** to **ON** position.

**3.7 Gliding flight**

**NOTE**

Gliding flight can be used for example in case of engine failure.

Wing flaps position	Retracted (0°)	Take-off (15°)
Airspeed	57 KIAS (66 mph IAS)	52 KIAS (60 mph IAS)



**3.8 Emergency landing**

**3.8.1 Emergency landing – with non–operating engine**

- 1. Airspeed ..... 57 KIAS (66 mph IAS)
- 2. Landing area ..... choose,  
determine wind direction
- 3. Safety harness ..... tighten up
- 4. Flaps ..... landing position (50°)
- 5. Airspeed ..... 48 KIAS (55 mph IAS)
- 6. Radiostation ..... notify situation to ATC – if  
possible
- 7. **FUEL SELECTOR** ..... **OFF**
- 8. Ignition ..... **OFF**
- 9. **MASTER SWITCH** ..... **OFF** before touch down

**3.8.2 Safety landing– with engine operating**

- 1. Area for landing ..... choose, determine wind  
direction, carry out passage  
flight with speed of 59 KIAS  
(68 mph IAS), flaps in take–off  
position (15°)
- 2. Radiostation ..... notify situation to ATC – if  
possible
- 3. Safety harness ..... tighten up
- 4. Flaps ..... landing position (50°)
- 5. Airspeed ..... 48 KIAS (55 mph IAS)
- 6. Landing ..... carry out



**3.8.3 Landing with burst tire**

**CAUTION**

WHEN LANDING AT HOLDING, KEEP THE WHEEL WITH BURST TIRE ABOVE THE GROUND AS LONG AS POSSIBLE BY MEANS OF AILERONS. IN CASE OF NOSE WHEEL BY MEANS OF ELEVATOR.

1. At running hold airplane direction by means of foot control and brakes

**3.8.4 Landing with damaged landing gear**

1. In case of nose landing gear damage touch down at the lowest possible speed and try to keep the airplane on main landing gear wheels as long as possible
2. In case of main landing gear damage touch down at the lowest possible speed and if possible keep direction at running

**3.9 Unintentional spin recovery**

**NOTE**

The airplane has not, when using normal techniques of pilotage, tendency to go over to spin spontaneously.

Standard procedure of recovery from spin:

1. **THROTTLE** lever ..... idle
2. Control stick ..... ailerons – neutral position
3. Pedals ..... kick the rudder pedal push against spin rotation direction
4. Control stick ..... push forward and hold it there until rotation stops
5. Pedals ..... immediately after rotation stopping, set the rudder to neutral position
6. Control stick ..... recover the diving

**CAUTION**

ALTITUDE LOSS PER ONE TURN AND RECOVERING FROM THE SPIN IS 500 UP TO 1000 ft.



**3.10 Other emergency procedures**

**3.10.1 Vibration**

If abnormal vibrations occur on the airplane then:

1. Set engine RPM to the mode in which the vibrations are the lowest
2. Land on the nearest possible airport, possibly perform safety landing according to par. 3.8.2. Safety landing.

**3.10.2 Carburettor icing**

Carburettor icing happens when air temperature drop in the carburettor occurs due to its acceleration in the carburettor and further cooling by evaporating fuel. Carburettor icing mostly happens during descending and approaching for landing (low engine RPM). Carburettor icing shows itself by engine power decreasing and by engine temperature increasing.

Recommended procedure for engine power regeneration is as follows:

1. **CARBURETTOR PREHEATER** (if installed) . . . **ON**
2. **THROTTLE** lever . . . . . set idle and cruising power again

**NOTE**

Ice coating in the carburettor should be removed by decrease and reincrease of engine power.

3. If the engine power is not successfully increased, then carry out landing at the nearest suitable airport or, if it is not possible, carry out precautionary landing according to par. 3.8.2 Precautionary landing.



## **CONTENTS**

### **4. NORMAL PROCEDURES**

<b>4.1 Introduction</b> .....	<b>4-3</b>
<b>4.2 Recommended speeds for normal procedures</b> .....	<b>4-3</b>
4.2.1 Take-off .....	4-3
4.2.2 Landing .....	4-3
<b>4.3 Assembly and disassembly</b> .....	<b>4-3</b>
<b>4.4 Pre-flight check</b> .....	<b>4-4</b>
<b>4.5 Normal procedures and checklist</b> .....	<b>4-7</b>
4.5.1 Before engine starting .....	4-7
4.5.2 Engine starting .....	4-8
4.5.3 Before taxiing .....	4-9
4.5.4 Taxiing .....	4-9
4.5.5 Before take-off .....	4-10
4.5.6 Take-off .....	4-11
4.5.7 Climb .....	4-11
4.5.8 Cruise .....	4-11
4.5.9 Descent .....	4-12
4.5.10 Before landing .....	4-12
4.5.11 Balked landing .....	4-13
4.5.12 Landing .....	4-13
4.5.13 After landing .....	4-14
4.5.14 Engine shut-off .....	4-14
4.5.15 Airplane parking .....	4-14

**Section 4**

*Normal  
Procedures*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

Intentionally left blank



#### **4.1 Introduction**

Section 4 describes operations and recommended procedures for normal operation of the airplane. Normal procedures following from system installation and optional equipment, which require supplementation of these Instructions, are shown in section 9 – Supplements.

#### **4.2 Recommended speeds for normal procedures**

##### **4.2.1 Take-off**

Climbing speed up to 50 ft  
(flaps in take-off pos. – 15°) ..... 55 KIAS (63 mph IAS)

Best rate-of-climb speed  $V_Y$   
(flaps in take-off pos. – 15°) ..... 55 KIAS (63 mph IAS)

Best rate-of-climb speed  $V_Y$   
(flaps retracted – 0°) ..... 62 KIAS (71 mph IAS)

Best angle-of-climb speed  $V_X$   
(flaps in take-off pos. – 15°) ..... 52 KIAS (60 mph IAS)

Best angle-of-climb speed  $V_X$   
(flaps retracted – 0°) ..... 54 KIAS (62 mph IAS)

##### **4.2.2 Landing**

Approaching speed for normal landing  
(flaps in landing position – 50°) ..... 48 KIAS (55 mph IAS)


#### **4.3 Assembly and disassembly**

Description of assembly and disassembly is given in the SPORTSTAR. Aircraft Maintenance and Inspection Procedures.



#### 4.4 Pre-flight check

Carry out pre-flight check according to the following procedure:

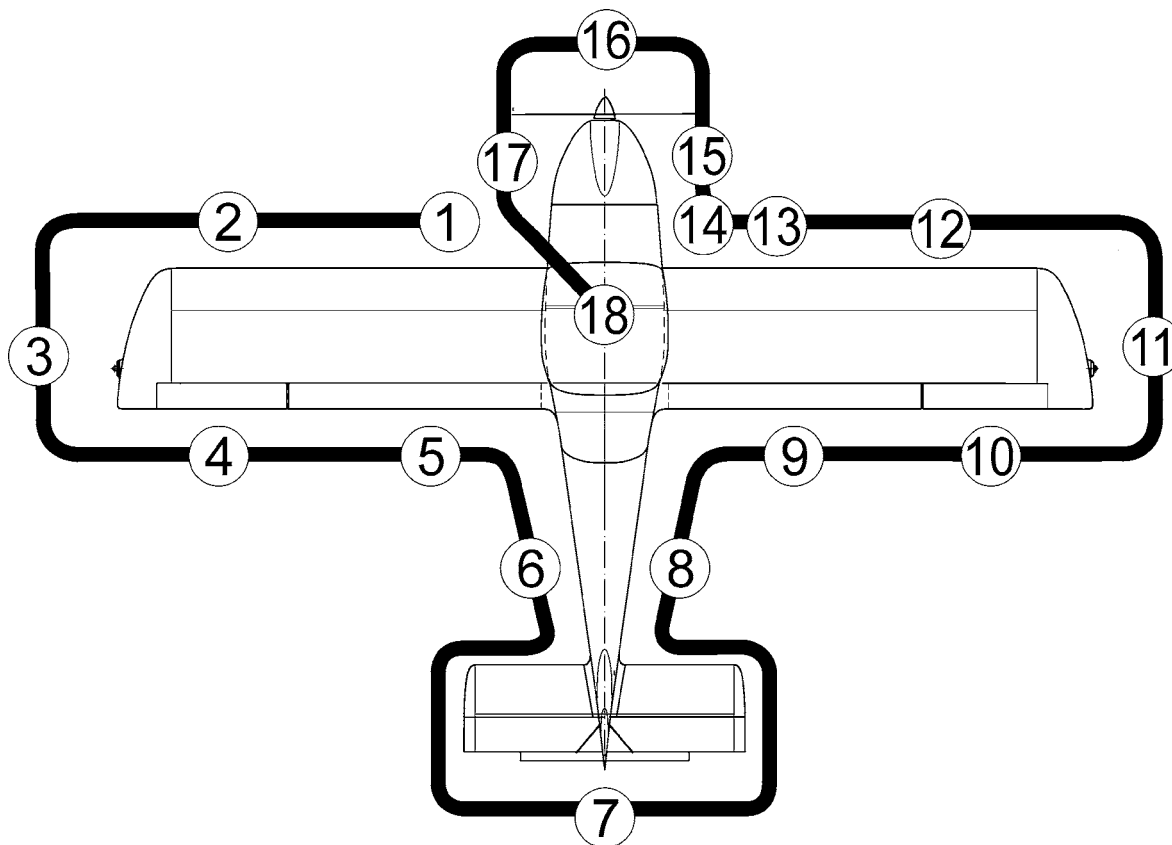

**Figure 4-1** Scheme of airplane pre-flight check

**WARNING**

**CHECK BEFORE PRE-FLIGHT CHECK THAT  
IGNITION IS SWITCHED OFF !**

**NOTE**

The word “condition”, used in procedures of pre-flight check, means visual check of surface, damage, deformation, scratches, attrition, corrosion, icing or other effects decreasing flight safety.

1. Left landing gear leg – check

- landing gear leg attachment and condition
- landing gear wheel condition
- tire condition and inflation
- condition and attachment of wheel covers, mudguards (if installed)



2. Left wing – check
  - wing surface condition
  - leading edge condition
  - landing light condition – if installed
  - condition of the Pitot tube
  - draining of fuel tank (see chapter 8.5, page 8–6)
  - closing of fuel tank cap
3. Left wing tip – check
  - surface condition
  - attachment check
  - fuel tank vent – cleanness
  - condition and attachment of the position lights and the anticollision beacon – if installed
4. Left aileron – check
  - surface condition
  - attachment
  - free movement
5. Left wing flap – check
  - surface condition
  - attachment
6. Rear part of fuselage – check
  - surface condition
  - condition of antennas (top and bottom fuselage surface) – if installed
7. Tail units – check
  - tail skid condition
  - surface condition
  - condition of rudder and elevator attachment
  - freedom of rudder and elevator movement
  - condition of trim tab, condition of elevator trim tab control
8. Rear part of fuselage – check
  - surface condition
9. Right wing flap– see 5.
10. Right aileron– see 4.
11. Right wing tip – see 3.



12. Right wing – see 2. except the landing light (if installed) and Pitot tube

13. Right landing gear leg – see 1.

14. Front part of the fuselage – right hand side – check

- tilting canopy attachment and condition
- condition of the nose landing gear leg
- nose wheel condition
- condition of the nose wheel control rods

15. Engine

Checks before the first flight of day – it is necessary to remove upper engine cowling:

- condition of engine bed
- condition of engine attachment
- condition of exhaust system
- condition of engine cowlings
- visual check on fuel and electrical system condition
- check on cooling liquid volume in the expansion tank on the engine body (replenish as required up to max. 2/3 of the expansion tank volume)

Checks before every flight:

- cleanness of air intakes
- check on oil level (between marks – flattenings on the dip stick)
- check on cooling liquid level in the overflow bottle (level should be between min. and max. mark)
- proper closing of the upper cowling

16. Propeller – check

- attachment
- condition of blades, hub and spinner

17. Front part of fuselage – left hand side – check

- tilting canopy attachment and condition

18. Cockpit – check

#### **NOTE**

Turn handle clockwise to open cockpit. When keyway is in handle axis, cockpit is locked. Unlock it first with key to keyway perpendicular position to the handle axis.

- receivers of condensate  
(only before the first flight of day) . . . . . check on absence of water



- all switches ..... **OFF**
- instrument equipment ..... check on condition
- check on presence of loose object in the cockpit
- check on adjusting and securing the rudder pedals (see section 7.3.3, page 7–4) – if installed adjustable rudder pedals

**WARNING**

**RIGHT AND LEFT PEDAL OF RUDDER CONTROL  
MUST BE SET TO THE SAME POSITIONS AND  
WELL SECURED!**

- Aircraft Operating Instructions  
and other required documents ..... check on completeness and validity

**4.5 Normal procedures and checklist**

**4.5.1 Before engine starting**

1. Pre–flight check and check on  
weight and centre of gravity position ..... done
2. Safety harnesses ..... check, fasten
3. Control stick ..... free
4. Rudder pedals ..... free
5. Wing flaps ..... function check
6. Trim tab ..... function check
7. **PARKING BRAKE** handle (if installed) ..... release brakes
8. Brakes ..... function check
9. Ignition ..... **OFF**
10. Canopy ..... close



4.5.2 Engine starting

1. **MASTER SWITCH** ..... **ON**
2. Fuel gauge indicators ..... check of fuel quantity
3. **FUEL SELECTOR** ..... **LEFT**  
Pull the safety button on the fuel selector, turn the handle to the left and then release safety button. Now the handle can be freely moved between left and right position. Safety button prevents unintentionally switch the selector to OFF position.
4. Electric fuel pump (if installed) ..... **ON**
5. **THROTTLE** lever ..... idle
6. Choke ..... as necessary  
(open by pulling up and lock by turning)
7. Space in the propeller area ..... free
8. **BEACON** (if installed) ..... **ON** (if necessary)
9. Ignition ..... **START** (see CAUTION) after starting up **BOTH**

**CAUTION**

ACTIVATE STARTER FOR 10 SEC. AS A MAXIMUM,  
THEN LET IT COOL DOWN FOR 2 MINUTES.

AFTER STARTING UP ENGINE, DO NOT CARRY OUT  
SUDDEN RPM CHANGES, AFTER POWER DE-  
CREASE WAIT FOR ABOUT 3 S IN ORDER TO REACH  
CONSTANT RPM BEFORE REACCELERATION.

10. **THROTTLE** lever ..... as necessary (see NOTE)
11. Oil pressure ..... up to 10s min. pressure
12. Electric fuel pump (if installed) ..... **OFF**

**NOTE**

After starting up engine, adjust throttle for smooth engine running at about 2500 RPM. Check oil pressure. Pressure must increase within 10s. Increase engine RPM until oil pressure is stabilised over 2 bar (29 PSI).

Electric fuel pump operates during engine starting period only. It is not intended for long continuous operation for long time.



- 13. Engine instruments ..... check
- 14. Choke ..... as necessary
- 15. Engine warming up ..... see NOTE

**NOTE**

Begin warming up with engine running at 2000 RPM. for about 2 minutes, continue at 2500 RPM. Warming time depends on outside air temperature until oil temperature reaches 50 °C (122 °F).

- 16. **FUEL SELECTOR** ..... **RIGHT**  
Verify proper engine feeding from the right tank for approx. 1 minute.
- 17. **FUEL SELECTOR** ..... **LEFT**

**NOTE**

Start engine with the fuel selector set to to **LEFT**. If you would start the engine with the fuel selector set to **RIGHT** and the left tank is full, than fuel bleed from the left tank vent may occur (and pollute environment) because a fuel return hose is led only into the left tank and returning fuel will overfill the left tank.

- 18. Radiostation/avionics ..... **ON**
- 19. Other electrical equipment ..... **ON** as necessary

4.5.3 Before taxiing

- 1. Transponder (if installed) ..... **SBY**
- 2. Outside lights (if installed) ..... as necessary

4.5.4 Taxiing

- 1. **THROTTLE** lever ..... as necessary
- 2. Brakes ..... check by depressing
- 3. Rudder pedals ..... function check
- 4. Direction of taxiing control by rudder pedals (these are mechanically connected with nose wheel control), possibly by slacking up left and right wheel of the main landing gear.



## 4.5.5 Before take-off

1. Brakes ..... brake
2. Ignition check ..... carry out, see NOTE

**NOTE**

Carry out ignition check in the following way :  
Set engine speed to 4000 RPM. Switch ignition gradually to **L**, **BOTH**, **R** position and return to **BOTH**.  
RPM drop with one ignition circuit switched off must not exceed 300 RPM. Maximum RPM difference at using one of the **L** or **R** circuits is 120 RPM.

3. Engine instruments ..... check
4. Control stick ..... free
5. Wing flaps ..... take-off pos. (15°)
6. Trim ..... **NEUTRAL**
7. Fuel gauge indicator ..... check on fuel quantity
8. **FUEL SELECTOR** ..... check **LEFT**
9. **CARBURETTOR PREHEATER** (if installed) .. check function then **OFF**

**NOTE**

If **CARBURETTOR PREHEATER** is switched **ON**, then engine RPM drop reaches approximately 50 RPM

10. Engine instruments ..... check
11. Flight instruments ..... check
12. Radiostation / avionics ..... check, set
13. Ignition ..... check **BOTH**
14. Choke ..... close (in inserted position)
15. **MASTER SWITCH** ..... check **ON**
16. Safety harnesses ..... tighten up
17. Canopy ..... closed
18. Transponder (if installed) ..... **ON** or **ALT**



4.5.6 Take-off

1. **THROTTLE** lever ..... max. take-off power
2. During take-off run smoothly lighten up the nose landing gear until airplane take-off occurs.
3. Airspeed ..... 55 KIAS (63 mph IAS)
4. Brakes ..... brake
5. After reaching 150 ft , set flaps to ..... retracted pos. (0°)
6. Trim ..... as necessary

**WARNING**

**TAKE-OFF IS PROHIBITED:**

- **IF ENGINE RUNNING IS IRREGULAR**
- **IF CHOKE IS OPEN**
- **IF VALUES OF ENGINE INSTRUMENTS ARE NOT WITHIN THE REQUIRED RANGE**

4.5.7 Climb

1. **THROTTLE** lever ..... max. continuous power
2. Airspeed .....  $V_Y = 62$  KIAS (71 mph IAS)  
for the best rate of climb or  
 $V_X = 54$  KIAS (62 mph IAS)  
for the best angle of climb
3. Engine instruments ..... check
4. Trim ..... as necessary

4.5.8 Cruise

1. **THROTTLE** lever ..... as necessary
2. Airspeed ..... max. 103 KIAS (118 mph IAS)
3. Engine instruments ..... check
4. Fuel quantity ..... check

**CAUTION**

FUEL GAUGES DISPLAY TRUE FUEL QUANTITY ONLY ON GROUND AND IN A LEVEL FLIGHT. TO READ TRUE FUEL QUANTITY AFTER TRANSITION FROM CLIMB/DESCENT WAIT APPROX. 2 MINUTES TO FUEL TO LEVEL.



**NOTE**

It is recommended to alternately switch the tanks during cruise to equally consume fuel from both tanks and minimize airplane tendency to bank with unbalanced tanks.

Do not fly with the fuel selector set to **RIGHT** if the left tank is full to avoid fuel bleed from left tank vent.

When the left tank fuel gauge indicates approx. 1/8 of fuel quantity (needle in the middle between 1/4 and 0) then switch to the right tank to consume remaining fuel and then switch back the left tank to complete the flight at left tank. If the engine conks out due to fuel consumption from either tank, then immediately switch the fuel selector to other tank and engine run will be recovered within 7 seconds.

- 5. **CARBURETTOR PREHEATER** (if installed) .. as necessary

4.5.9 Descent

- 1. **THROTTLE** lever ..... as necessary
- 2. Airspeed ..... as necessary
- 3. Trim ..... as necessary
- 4. Engine instruments ..... check
- 5. **CARBURETTOR PREHEATER** (if installed) .. as necessary

**CAUTION**

AT LONG APPROACHING AND DESCENDING FROM HIGH ALTITUDE IT IS NOT SUITABLE TO REDUCE THROTTLE TO MINIMUM FOR THE REASON OF POSSIBLE ENGINE UNDERCOOLING AND SUBSEQUENT LOSS OF POWER. PERFORM DESCENDING AT INCREASED IDLE AND CHECK OBSERVANCE OF THE ALLOWED VALUES ON ENGINE INSTRUMENTS.

4.5.10 Before landing

- 1. Fuel quantity ..... check

**CAUTION**

FUEL GAUGES DISPLAY TRUE FUEL QUANTITY ONLY ON GROUND AND IN A LEVEL FLIGHT. TO READ TRUE FUEL QUANTITY AFTER TRANSITION FROM CLIMB/DESCENT WAIT APPROX. 2 MINUTES TO FUEL TO LEVEL.



- 
- |   |                            |
|---|----------------------------|
| 2. <b>FUEL SELECTOR</b> .....                     | <b>LEFT</b>                |
| 3. Engine instruments .....                       | check                      |
| 4. Brakes .....                                   | check by depressing pedals |
| 5. Safety harnesses .....                         | tighten up                 |
| 6. Free area of landing .....                     | check                      |
| 7. <b>CARBURETTOR PREHEATER</b> (if installed) .. | <b>ON</b>                  |
| 8. Approaching speed .....                        | 59 KIAS (68 mph IAS)       |
| 9. Flaps .....                                    | take-off pos. (15°)        |
| 10. Trim .....                                    | as necessary               |

**FINAL**

- |   |                           |
|---|---------------------------|
| 1. Flaps .....                                    | landing pos. (30° or 50°) |
| 2. Maintain airspeed .....                        | 48 KIAS (55 mph IAS)      |
| 3. Trim .....                                     | as necessary              |
| 4. <b>CARBURETTOR PREHEATER</b> (if installed) .. | <b>OFF</b>                |

**4.5.11 Balked landing**

- |                                |                       |
|--------------------------------|-----------------------|
| 1. <b>THROTTLE</b> lever ..... | max. take-off power   |
| 2. Flaps .....                 | take-off pos. (15°)   |
| 3. Airspeed .....              | 55 KIAS (63 mph IAS)  |
| 4. Flaps in 150 ft .....       | retracted pos. (0°)   |
| 5. Trim .....                  | as necessary          |
| 6. <b>THROTTLE</b> lever ..... | max. continuous power |
| 7. Instruments .....           | check                 |
| 8. Climb at airspeed .....     | 62 KIAS (71 mph IAS)  |

**4.5.12 Landing**

- |   |              |
|---|--------------|
| 1. <b>THROTTLE</b> lever .....                              | idle         |
| 2. Touch-down on main landing gear wheels ..                | carry out    |
| 3. Brakes after nose landing gear<br>wheel touch-down ..... | as necessary |



## 4.5.13 After landing

1. Flaps ..... retracted pos. (0°)
2. Trim ..... **NEUTRAL**
3. Outside lights (if installed) ..... **OFF**
4. Transponder (if installed) ..... **OFF**

## 4.5.14 Engine shut-off

1. **THROTTLE** lever ..... idle
2. Engine instruments ..... check
3. Radiostation / avionics ..... **OFF**
4. Other electrical equipment ..... **OFF**
5. Ignition ..... **OFF**
6. **BEACON** (if installed) ..... **OFF**
7. **MASTER SWITCH** ..... **OFF**

## 4.5.15 Airplane parking

1. Ignition ..... check **OFF**
2. **MASTER SWITCH** ..... check **OFF**
3. **FUEL SELECTOR** ..... **OFF**

Pull the safety button on the fuel selector, turn the handle to the OFF position and then release safety button. Now the handle is blocked in the OFF position. Safety button prevents unintentionally switch the selector from the OFF position.

4. **PARKING BRAKE** handle (if installed) ..... brake as necessary
5. Canopy ..... close, lock as necessary

**NOTE**

It is recommended to use parking brake (if installed) for short-time parking only, between flights during a flight day. After ending the flight day or at low temperatures of ambient air, do not use parking brake, but use the wheel chocks instead.



## **CONTENTS**

### **5. PERFORMANCE**

<b>5.1 Introduction</b> .....	<b>5-3</b>
<b>5.2 Approved data</b> .....	<b>5-4</b>
5.2.1 Airspeed indicator system calibration .....	5-4
5.2.2 Stall speeds .....	5-6
5.2.3 Take-off distance .....	5-7
5.2.4 Landing distance .....	5-7
5.2.5 Climb performance .....	5-8
<b>5.3 Additional information</b> .....	<b>5-10</b>
5.3.1 Cruise .....	5-10
5.3.2 Horizontal speeds .....	5-11
5.3.3 Endurance .....	5-12
5.3.4 Balked landing climb .....	5-13
5.3.5 Effect on flight performance and characteristics .....	5-14
5.3.6 Demonstrated crosswind performance .....	5-14
5.3.7 Ceiling .....	5-15
5.3.8 Noise data .....	5-15



Intentionally left blank



## 5.1 Introduction

Section 5 provides data for airspeed calibration, stall speeds, take-off performance and nonapproved additional information, provided by the airplane type certificate owner.

The stated performance data has been computed from actual flight tests with the SPORTSTAR airplane and ROTAX 912 ULS engine in good condition and using average piloting techniques.

### **CAUTION**

THE PERFORMANCE STATED IN THIS SECTION IS VALID FOR ROTAX 912 ULS (100 HP) TOGETHER WITH WOODCOMP KLASSIC 170/3/R PROPELLER INSTALLED IN THE AIRPLANE, OTHERWISE SEE SECTION 9 – SUPPLEMENTS FOR ACTUAL PERFORMANCE.



**5.2 Approved data**

5.2.1 Airspeed indicator system calibration

**NOTE**

Assumed zero instrument error.

Valid for airplane take-off weight 1213 lbs (550 kg) .

KIAS	kts CAS		
	flaps 0°	15°	50°
37			39
40		42	41
43	45	44	44
45	47	46	45
48	49	49	48
50	51	50	49
53	53	53	52
55	55	54	54
58	58	57	57
61	60	60	60
64	63	63	63
67	66	66	66
70	68	68	69
75	73		
80	77		
85	81		
90	86		
95	90		
100	95		
105	99		
110	104		
115	109		
120	113		
125	118		
130	122		
135	127		
140	132		
146	137		



# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS

Doc. No. S2006AOIUS

mph IAS	mph CAS		
	flaps 0°	15°	50°
43			45
46		48	47
50	52	51	50
55	57	56	55
59	60	59	59
65	65	64	64
70	69	69	69
76	74	74	74
80	78	77	77
85	82		
90	87		
95	91		
100	96		
105	100		
110	105		
115	109		
120	114		
125	118		
130	123		
135	127		
140	132		
145	137		
150	141		
155	146		
160	151		
168	158		



5.2.2 Stall speeds

- Conditions:**
- wing level stall – engine at idle power
  - turning flight stall – engine at 75% max. continuous power
  - airplane weight: 1213 lbs (550 kg)

**NOTE**

The stated stall speeds are valid for all flight altitudes.

Altitude losses shown in the table present max. values determined on the basis of flight tests using average piloting technique.

	Flaps position	Stall speed		Altitude loss ft
		KIAS	KCAS	
Wing level flight	Retracted (0°)	42	44	200
	Take-off (15°)	40	42	
	Landing (50°)	37	39	
Turn flight (coordinated turn, 30° bank)	Retracted (0°)	46	48	200
	Take-off (15°)	43	45	
	Landing (50°)	40	41	

	Flaps position	Stall speed		Altitude loss ft
		mph IAS	mph CAS	
Wing level flight	Retracted (0°)	49	51	200
	Take-off (15°)	46	48	
	Landing (50°)	43	45	
Turn flight (coordinated turn, 30° bank)	Retracted (0°)	53	55	200
	Take-off (15°)	50	52	
	Landing (50°)	46	47	



### 5.2.3 Take-off distance

- Conditions:**
- engine: max. take-off power
  - flaps: Take-off (15°)
  - carburettor preheating: OFF
  - airplane weight: 1213 lbs (550 kg)
  - Altitude: 0 ft ISA
  - ambient air temperature: ISA

	Take-off run	Take-off distance to height of 50 ft (15 ft)
Dray concrete	570 ft (174 m)	1310 ft (399 m)
Grass	660 ft (200 m)	1395 ft (425 m)

- Corrections:**
- Influence of wind: Add 4% on every 1 kt (1.15 mph) of tail wind
  - RWY inclination: Add 8% of the take-off run distance on 1% of runway inclination up the slope

### 5.2.4 Landing distance

- Conditions:**
- engine: idle
  - flaps: Landing 50°
  - carburettor preheating: OFF
  - airplane weight: 1213 lbs (550 kg)
  - Altitude: 0 ft ISA
  - ambient air temperature: ISA



	Landing distance from height of 50 ft (15 ft)	Braked landing run
Dray concrete	1185 ft (360 m)	545 ft (165 m)
Grass	1125 ft (343 m)	485 ft (148 m)

- Corrections:**
- Influence of wind: Add 4.5 % on every 1 kt (1.15 mph) of tail wind
  - RWY inclination: Add 8% of the landing run distance on 1% of runway inclination down the slope



5.2.5 Climb performance

- Conditions:**
- engine: maximum take-off power
  - flaps: retracted (0°)
  - carburettor preheating: OFF
  - airplane weight: 1213 lbs (550 kg)
  - ambient air temperature: ISA

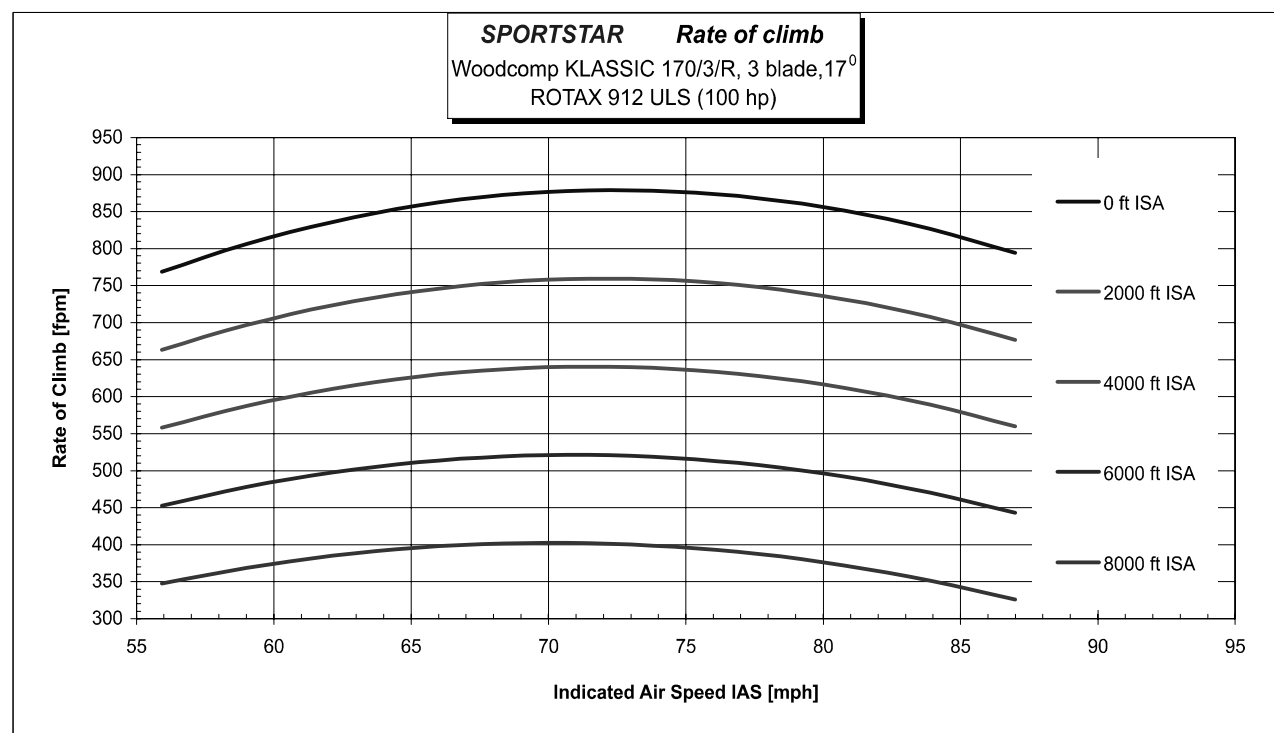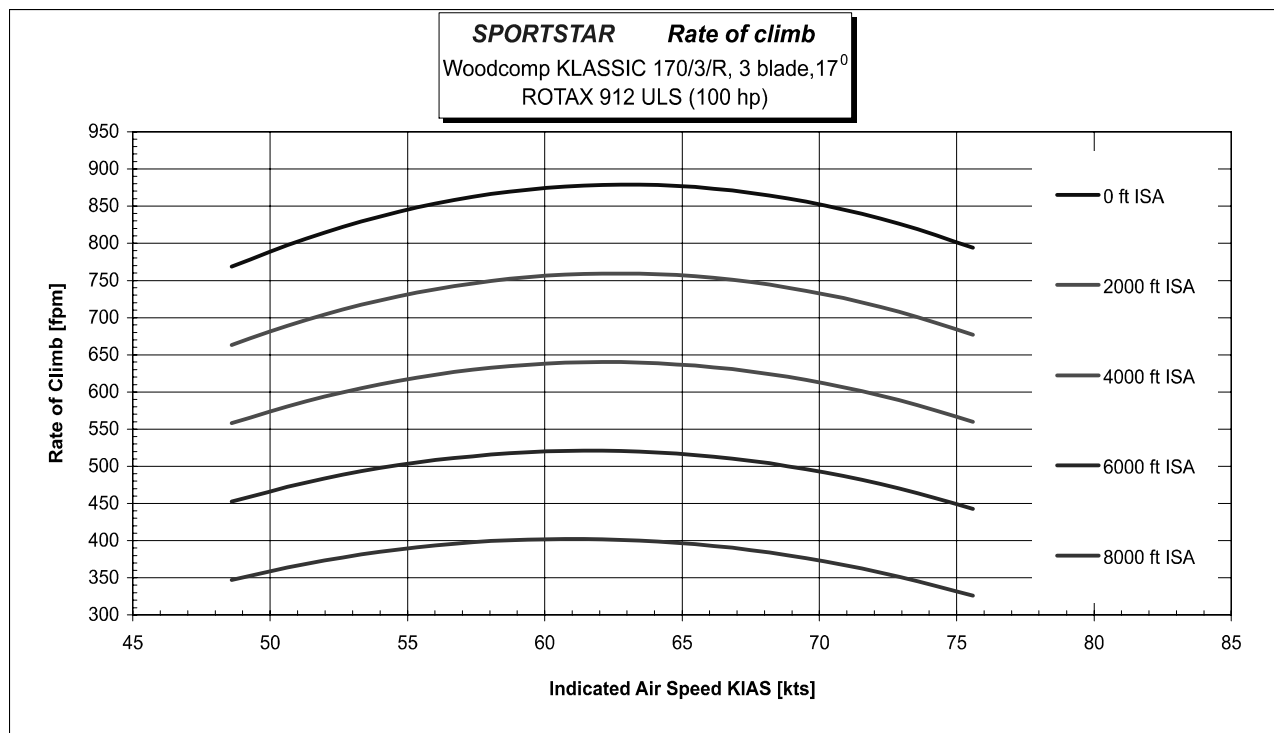



# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS

**Section 5**  
Performance

Doc. No. S2006AOIUS

Best rate of climb for various altitudes is mentioned in the following table:



Altitude Hp [ft ISA]	Best rate of climb speed			Maximum Rate of climb	
	IAS [km/h]	KIAS	IAS [mph]	[m/s]	[ft/min]
0	114	61	71	4,4	880
1000	113	61	70	4,2	820
2000	113	61	70	3,9	760
3000	112	61	70	3,6	710
4000	112	61	70	3,3	650
5000	112	60	69	3,0	590
6000	111	60	69	2,7	540
7000	111	60	69	2,4	480
8000	110	60	69	2,1	420
9000	110	59	68	1,9	370
10000	109	59	68	1,6	310



**5.3 Additional information**

**5.3.1 Cruise**

- Conditions:**
- flaps: retracted (0°)
  - carburetter preheating: OFF
  - airplane weight: 1213 lbs (550 kg)
  - ambient air temperature: ISA

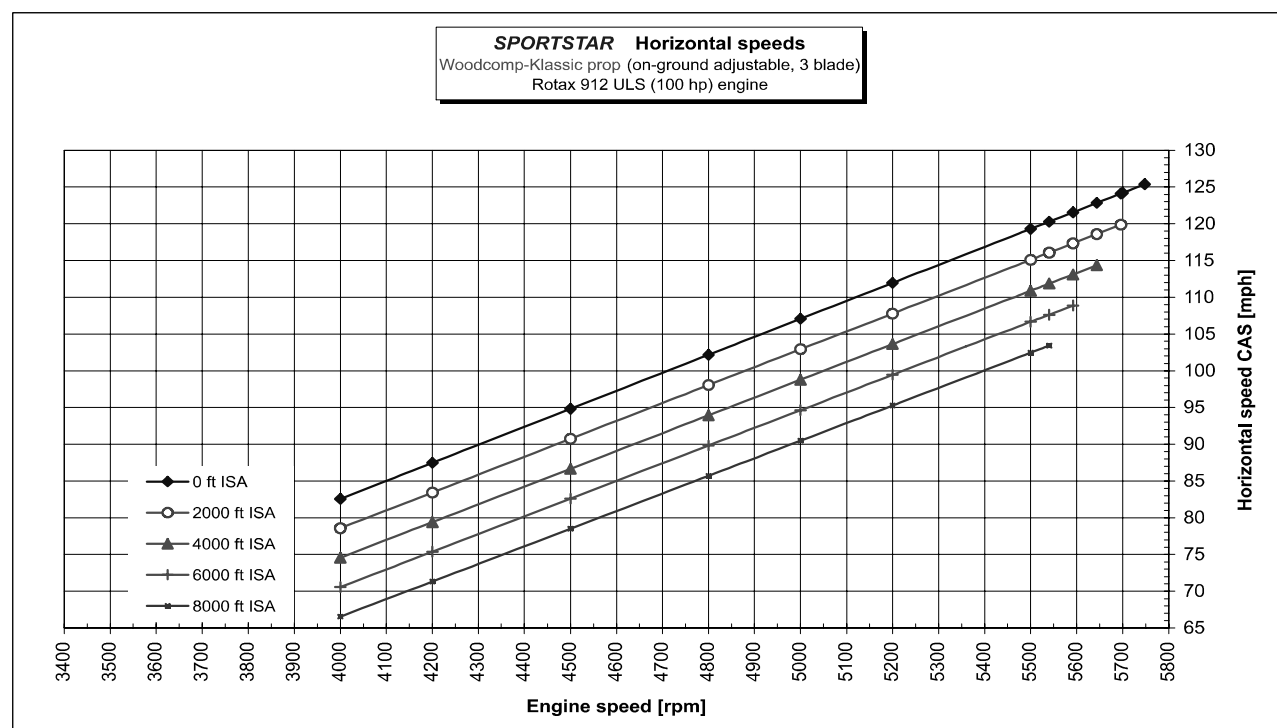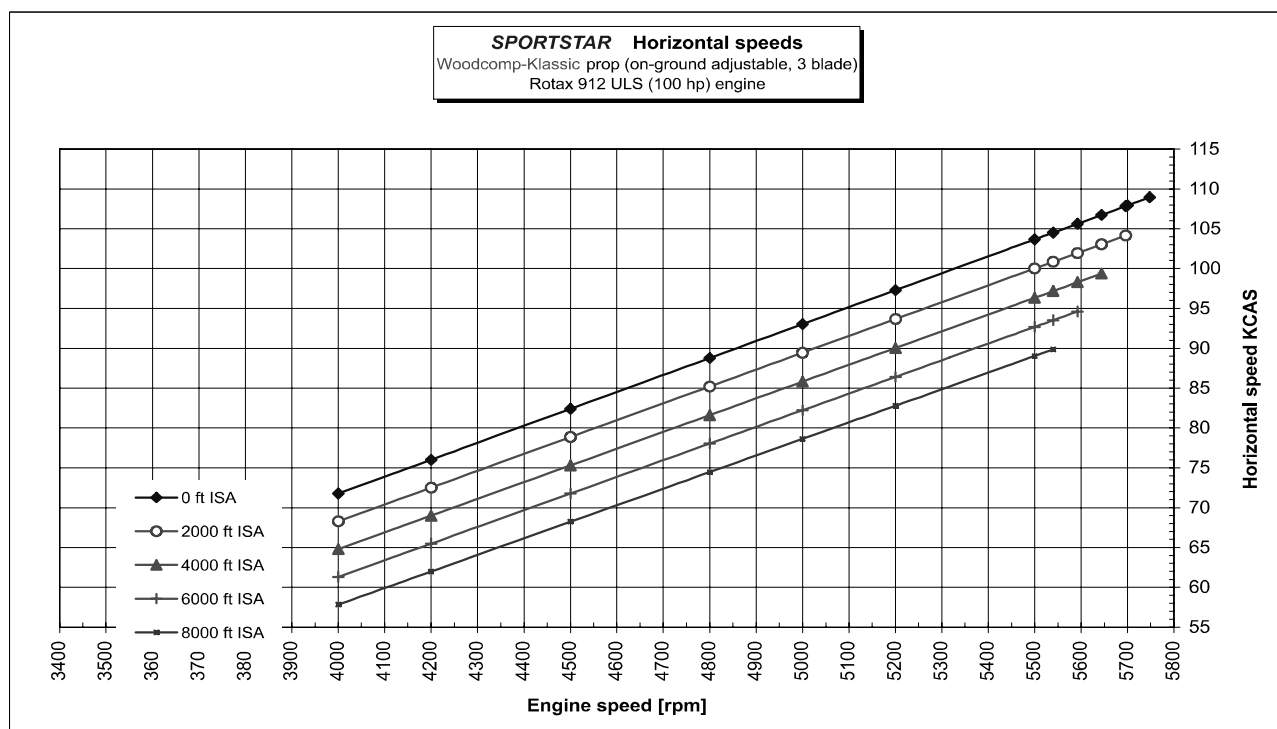



# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS

Doc. No. S2006AOIUS

### 5.3.2 Horizontal speeds

In the following table states Indicated airspeeds (IAS) and corresponding True air speeds versus altitude, all for various engine speeds.

Engine speed RPM		Cruising Regime				Maximum Continuous Power	Maximum Takeoff Power	
		4500	4800	5000	5200			
Altitude [ft ISA]	0	IAS	86	94	99	104	111	116
		KTAS	82	89	93	97	104	108
	2000	IAS	82	90	94	99	107	
		KTAS	81	88	92	96	103	
	4000	IAS	78	85	90	95	102	
		KTAS	80	87	91	96	102	
	6000	IAS	74	81	86	91	98	
		KTAS	78	85	90	94	101	
	8000	IAS	70	77	82	87	94	
		KTAS	77	84	89	93	100	

Engine speed RPM		Cruising Regime				Maximum Continuous Power	Maximum Takeoff Power	
		4500	4800	5000	5200			
Altitude [ft ISA]	0	IAS [mph]	99	108	113	119	128	133
		TAS [mph]	95	102	107	112	119	124
	2000	IAS [mph]	95	103	109	114	123	
		TAS [mph]	93	101	106	111	119	
	4000	IAS [mph]	90	98	104	109	118	
		TAS [mph]	92	100	105	110	118	
	6000	IAS [mph]	85	94	99	105	113	
		TAS [mph]	90	98	103	109	117	
	8000	IAS [mph]	80	89	94	100	108	
		TAS [mph]	89	97	102	107	116	



5.3.3 Endurance

- Conditions:**
- flaps: retracted (0°)
  - carburettor preheating: OFF
  - airplane weight: 1213 lbs (550 kg)
  - ambient air temperature: ISA

**Fuel consumption, Range, endurance of SPORTSTAR II with wet wing**

Fuel Tanks Total Volume =	120 l	31,7 USgal	26,4 UKgal
Fuel Reserve* =	8 l	2,1 USgal	1,8 UKgal



\* reserve is approx. 1/8 on fuel gauge

Altitude 2000 ft ISA		55% MCP	65% MCP	75% MCP	MCP Max. Continuous Power
Engine speed	[rpm]	4300	4800	5000	5500
Fuel consumption	[l/h]	14,1	18,6	20,5	25,1
	[USgal/h]	3,7	4,9	5,4	6,6
	[UKgal/h]	3,1	4,1	4,5	5,5
IAS	[km/h]	143	164	172	194
	[knots]	77	89	93	105
	[mph]	89	102	107	120
CAS	[km/h]	141	160	167	186
	[knots]	76	86	90	100
	[mph]	88	99	104	116
TAS	[km/h]	145	165	172	192
	[knots]	78	89	93	103
	[mph]	90	102	107	119
Total Endurance (including endurance at reserve)	[hour,min]	8,31	6,26	5,51	4,47
Total Range (including range at reserve)	[km]	1210	1030	950	860
	[NM]	653	556	513	464
	[miles]	752	640	590	534
Endurance at reserve	[hour,min]	0,34	0,26	0,23	0,19
Range at reserve	[km]	50	40	40	40
	[NM]	27	22	22	22
	[miles]	31	22	22	22



5.3.4 Balked landing climb

- Conditions:**
- engine: maximum take-off power
  - carburettor preheating: OFF
  - flaps: landing position (50°)
  - airplane weight: 1213 lbs (550 kg)
  - ambient air temperature: ISA

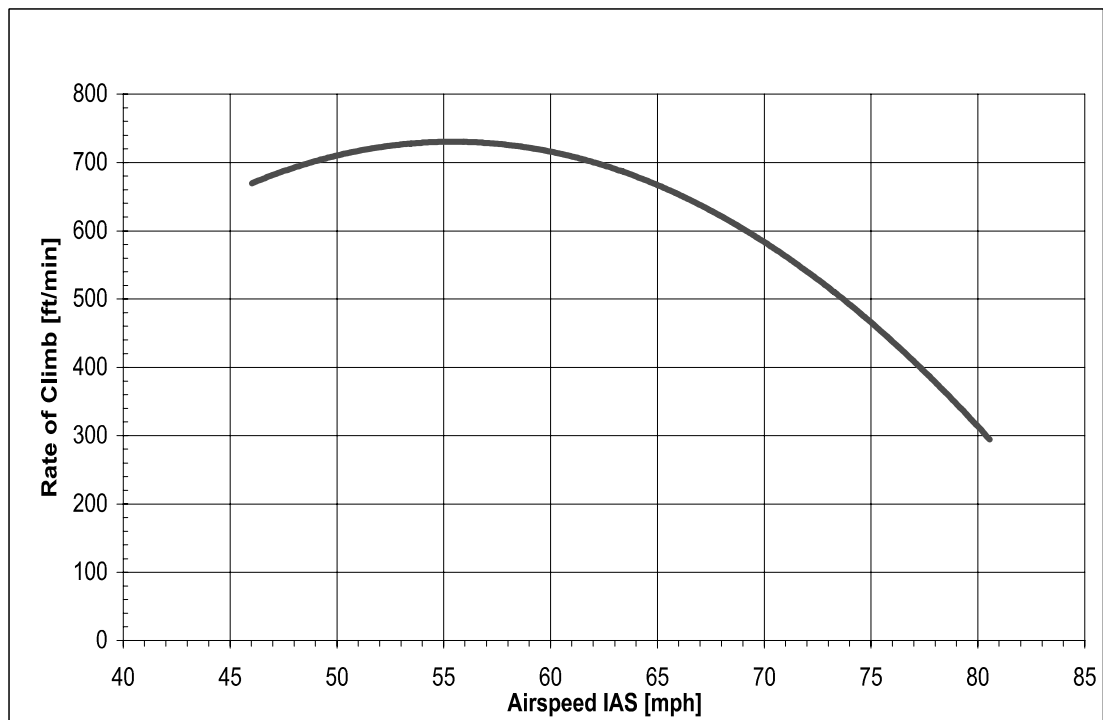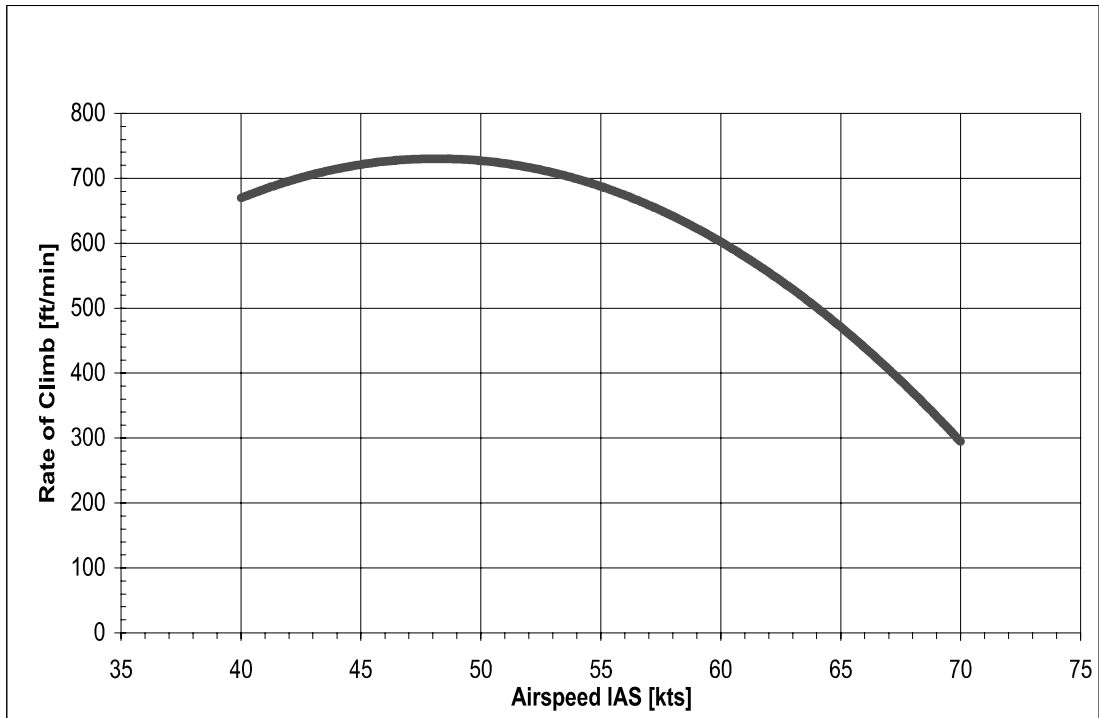



5.3.5 Effect on flight performance and characteristics


Flight performances and characteristics are not considerably affected by rain or insect stuck on the airplane surface.

5.3.6 Demonstrated crosswind performance

Maximum demonstrated speed of wind  
at airplane operation ..... 24 kts (28 mph)

Maximum demonstrated speed of cross wind  
for take-off and landing ..... 10 kts (12 mph)

Maximum demonstrated speed of tail wind ..... 6 kts (7 mph)

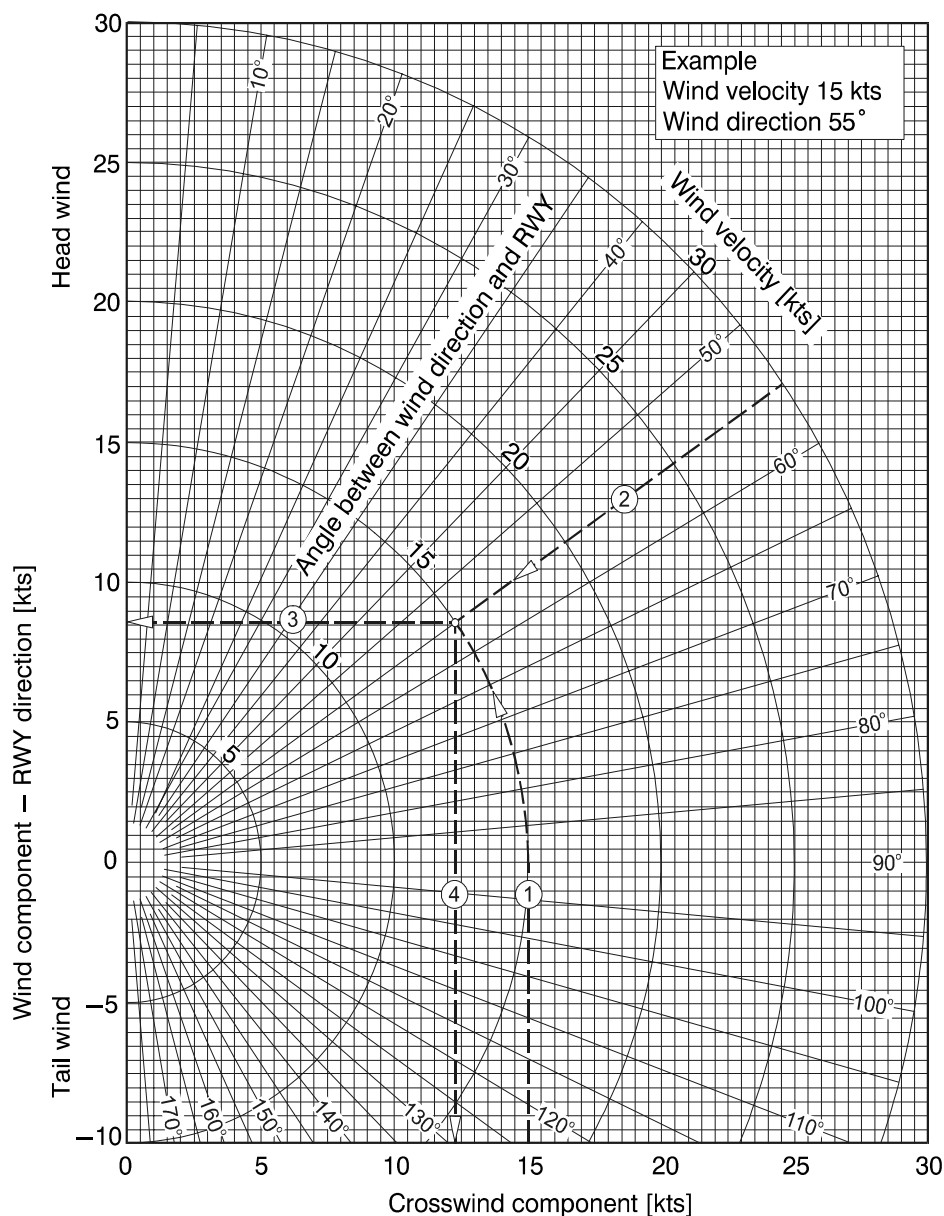

**Figure 5-1** Influence of wind on take-off and landing



**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**

Doc. No. S2006AOIUS

---

5.3.7 Ceiling

Service ceiling of SPORTSTAR ..... 13 600 ft

5.3.8 Noise data

Not measured.

– END –



## **CONTENTS**

### **6. WEIGHT AND BALANCE**

<b>6.1 Introduction .....</b>	<b>6-3</b>
<b>6.2 Weight and balance record .....</b>	<b>6-5</b>
<b>6.3 Permitted payload range .....</b>	<b>6-7</b>

**Section 6**

*Weight &  
Balance*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

Intentionally left blank



## **6.1 Introduction**

This section includes airplane weighing procedure a determination of its centre of gravity position, further then determination of allowed loading range at which SPORTSTAR airplane can be safely operated.

Procedures for weighing the airplane and the calculation method for establishing the permitted payload range are contained in the Aircraft Maintenance and Inspection Procedures for the SPORTSTAR Light Sport Aircraft.

**Section 6**

*Weight &  
Balance*

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

Intentionally left blank







**6.3 Permitted payload range**

Maximum weight of crew [kg]													
Date	Empty weight [kg]	C.G. [% MAC]	Fuel tanking						Approved by				
			1	0.8	0.6	0.4	0.2	Date	Signature				
			Fuel volume [litres]	120	100	75	50			25			
Fuel weight [kg]	86	72	54	36	18								
			25 kg										
			12 kg										
			0 kg										
			25 kg										
			12 kg										
			0 kg										
			25 kg										
			12 kg										
			0 kg										
			25 kg										
			12 kg										
			0 kg										
			25 kg										
			12 kg										
			0 kg										
				<b>B A G G A G E</b>									

**Section 6**

Weight and  
balance

**SPORTSTAR**  
**AIRCRAFT OPERATING INSTRUCTIONS**

Doc. No. S2006AOIUS



Maximum weight of crew [lbs]																
Date	Empty weight [lbs]	C.G. [% MAC]	Fuel tanking										Approved by			
			1	0.8	0.6	0.4	0.2	Fuel volume [U.S. gallons]	Fuel weight [lbs]	Date	Signature					
			31.7	26.4	19.8	13.2	6.6									
			190	159	119	79	40									
			55 lbs	26 lbs	0 lbs	55 lbs	26 lbs	0 lbs	55 lbs	26 lbs	0 lbs	55 lbs	26 lbs	0 lbs	55 lbs	26 lbs
			<b>B A G G A G E</b>													



## **CONTENTS**

### **7. AIRPLANE AND SYSTEM DESCRIPTION**

<b>7.1 Introduction</b> .....	<b>7-3</b>
<b>7.2 Airframe</b> .....	<b>7-3</b>
7.2.1 Fuselage .....	7-3
7.2.2 Wing .....	7-3
7.2.3 Horizontal tail unit (HTU) .....	7-3
7.2.4 Vertical tail unit (VTU) .....	7-3
<b>7.3 Control</b> .....	<b>7-4</b>
7.3.1 Longitudinal control .....	7-4
7.3.2 Lateral control .....	7-4
7.3.3 Rudder control .....	7-4
7.3.4 Elevator trim tab control .....	7-4
<b>7.4 Controls in cockpit</b> .....	<b>7-5</b>
<b>7.5 Instrument panel</b> .....	<b>7-6</b>
<b>7.6 Inside and outside marking and placards</b> .....	<b>7-6</b>
<b>7.7 Landing gear and brakes</b> .....	<b>7-6</b>
7.7.1 Landing gear .....	7-6
7.7.2 Brakes .....	7-6
<b>7.8 Seat and safety harnesses</b> .....	<b>7-6</b>
<b>7.9 Baggage compartment</b> .....	<b>7-6</b>
<b>7.10 Canopy</b> .....	<b>7-7</b>
<b>7.11 Power unit</b> .....	<b>7-7</b>
7.11.1 General .....	7-7
7.11.2 Engine control .....	7-7
7.11.3 Engine instruments .....	7-7
7.11.4 Engine cooling system .....	7-8
7.11.5 Engine lubrication system .....	7-9
7.11.6 Engine intake system .....	7-9
7.11.7 Ignition system .....	7-9

**Section 7**

*Airplane and System  
Description*

**SPORTSTAR**

**AIRCRAFT OPERATING INSTRUCTIONS**



Doc. No. S2006AOIUS

---

<b>7.12 Fuel system</b> .....	<b>7-10</b>
7.12.1 Fuel tank .....	7-10
7.12.2 Fuel selector .....	7-10
7.12.3 Fuel filter .....	7-11
7.12.4 Indication of fuel quantity .....	7-11
7.12.5 Fuel tank draining .....	7-11
<b>7.13 Electrical system</b> .....	<b>7-13</b>
7.13.1 Lightning .....	7-13
7.13.2 Electrical system scheme .....	7-13
<b>7.14 Pitot-static system</b> .....	<b>7-14</b>
<b>7.15 Supplementary equipment</b> .....	<b>7-15</b>
7.15.1 Ventilation and heating system .....	7-15
<b>7.16 Navigation and communication equipment</b> .....	<b>7-15</b>





### 7.3 Control

Airplane control consists of ailerons, elevator and rudder. Directional control is connected by means of pull rods with nose landing gear control. Main landing gear brakes are controlled by pedals of directional control.

Airplane is equipped with dual control enabling flight with two-member crew.

#### 7.3.1 Longitudinal control

Longitudinal control is actuated by the control stick. Longitudinal movement of control stick is transferred to the elevator by mechanical system of pull rods and levers.

#### 7.3.2 Lateral control

Lateral control is actuated by the control stick. From the control stick the movement is transferred through the system of levers and pull rods to ailerons.

#### 7.3.3 Rudder control

Rudder control is controlled by pedals of foot control. The rudder is interconnected with foot control pedals by cable system.

Foot control pedals adjustable into three positions can be installed as an option.

Way of adjustment of rudder pedals:

1. Release the pin from the adjusting groove
2. Set pedal to one of three possible positions
3. Check on the pin locking-on in the adjusting groove

<b>WARNING</b>
----------------

**RIGHT AND LEFT PEDAL OF RUDDER CONTROL  
MUST BE ADJUSTED IN THE SAME POSITIONS  
AND SECURED!**


#### 7.3.4 Elevator trim tab control

The elevator trim tab is controlled by the lever located in between the pilot seats.

The control lever is interconnected with the trim tab by means of bowdwen-cables.



## 7.4 Controls in cockpit

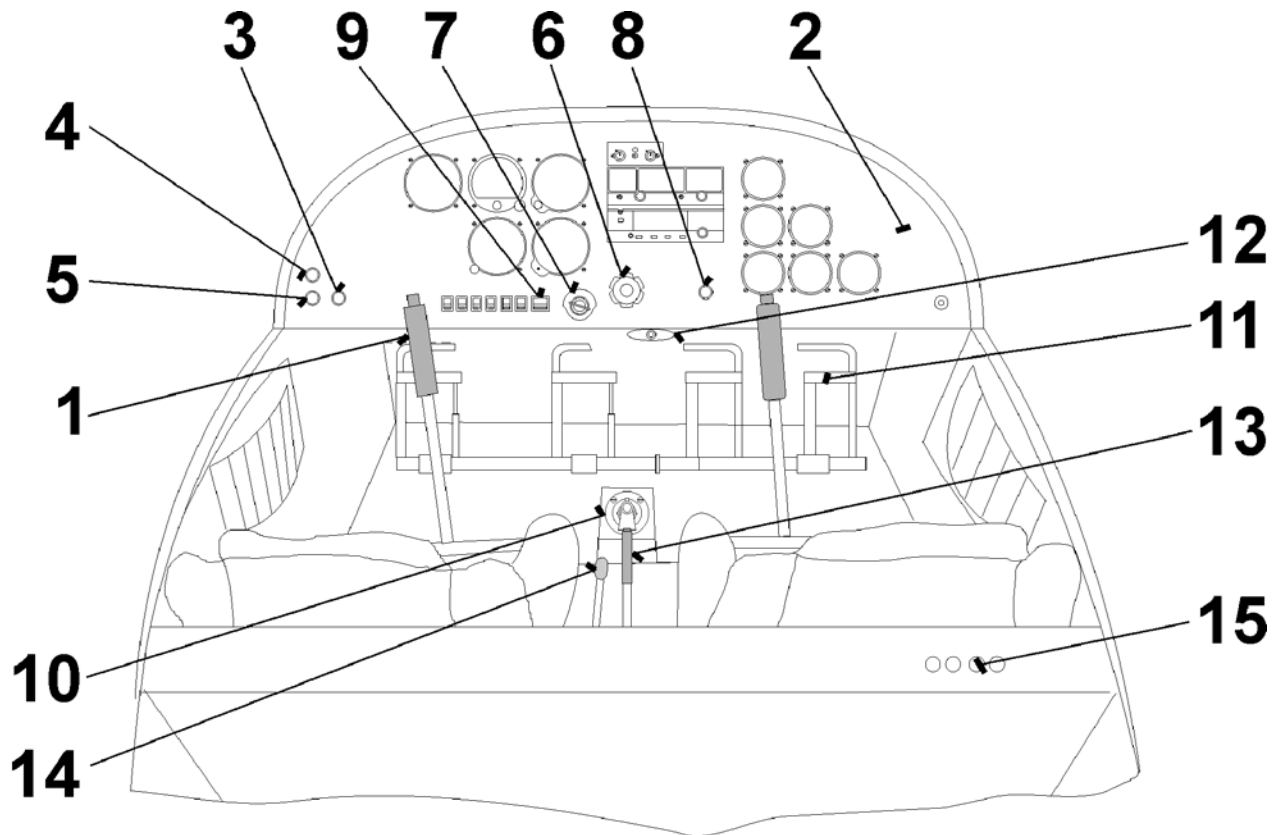

- |   |   |
|---|---|
| 1 Control stick   | 8 Choke   |
| 2 Instrument panel  | 9 Master switch                                       |
| 3 Carburettor pre-heating knob<br>(if installed)            | 10 Fuel selector                                      |
| 4 Cockpit heating / canopy defog<br>selector (if installed) | 11 Rudder control pedals                              |
| 5 Hot air supply knob (if installed)                        | 12 Emergency parachute<br>system lever (if installed) |
| 6 Throttle lever  | 13 Flap control lever                                 |
| 7 Ignition  | 14 Trim control lever                                 |
|   | 15 Headset sockets                                    |

**Figure 7-1** Cockpit control elements



## **7.5 Instrument panel**

See section 9 – supplements.

## **7.6 Inside and outside marking and placards**

See Aircraft Maintenance and Inspection Procedures.

## **7.7 Landing gear and brakes**

### **7.7.1 Landing gear**

The airplane is equipped with a sort of fixed nose landing gear. Main landing gear legs are produced from composite spring. Nose landing gear leg is welded from two pieces – the tube and the yoke– in which the nose wheel is mounted. The nose landing gear is spring–loaded by a rubber rope. The nose wheel is steerable, wheel control is coupled with rudder control by means of two pull rods. Wheels can be fitted with fiber–glass aerodynamic pants.

### **7.7.2 Brakes**

The SPORTSTAR airplane is equipped with disk hydraulic brakes on main landing gear wheels. Brake system is composed of brake pedals (these are a part of rudder control pedals), brake pumps, hoses for leading brake liquid, brake yokes with wheel cylinders and brake pads. By depressing the brake pedals compression of brake pumps occurs, which generates pressure in brake circuit and hydraulic cylinders press the brake pads onto the brake disks. Braking pressure can be regulated only by force of brake pedals depressing.

The airplane can be equipped by mechanical manually controlled parking brake.

**PARKING BRAKE** handle is located in between the pilot seats.

## **7.8 Seat and safety harnesses**

SPORTSTAR is a two–seat airplane with side–by–side seats. Seats are fixed, non–adjustable and fitted with light upholstery.

Each of seats is fitted with four–point safety harness which is composed of safety belts, shoulder straps and lock. The safety harness is anchored in the middle of the frame behind the baggage compartment and on the seat sides .

## **7.9 Baggage compartment**

Baggage compartment is positioned behind seat rests.

Maximum weight of baggage is 33 lbs (15 kg) and is stated on the placard in the baggage compartment. The baggage compartment is fitted with rubber straps for baggage fixation.





### Cylinder head thermometer

The cylinder head thermometer transmitter senses temperature of cylinder No. 3. Working range of the cylinder head thermometer is  $50 \div 150$  °C ( $120 \div 300$  °F). Colour code is stated in section 2, page 2–5.

### Oil thermometer

Oil temperature on engine input is measured by the sensor located behind the oil pump. Working range of oil thermometer is  $50 \div 150$  °C. ( $120 \div 300$  °F). Colour code is stated in section 2, page 2–5.

### Oil pressure gauge


Oil pressure on the oil input into engine is measured by means of sensor which is located behind the oil filter. Working range is  $0 - 10$  bar. ( $0 \div 150$  PSI). Colour code is stated in section 2, page 2–5.

#### 7.11.4 Engine cooling system

Engine cooling is combined, cylinder heads are cooled by water, cylinders are cooled by air.

Cooling circuit of cylinder heads is designed as a closed system containing pump, expansion reservoir (1) with pressure closure (3), cooler of cooling liquid (2) and drainage reservoir (4). Scheme of cylinder head cooling system is shown in Fig. 7-2.

When changing, the cooling liquid is filled up through the cap of expansion reservoir (1), during airplane operation it is replenished into drainage reservoir (4) between the lines of maximum and minimum level.

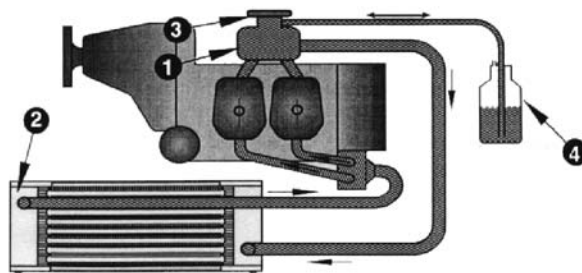


**Figure 7-2** Scheme of cylinder head cooling system



### 7.11.5 Engine lubrication system

Engine lubrication system is performed with the dry crank case. Engine lubrication system is equipped with oil pump (1) ensuring oil feeding from reservoir (4) located on the fire wall through the oil cooler (5) and the oil cleaner (6) to the lubricated points of engine. The pressure sensor (2) is located behind the oil pump. The oil reservoir is aerated by the hose (7) which is led under the airplane. Oil pressure and temperature are indicated on instruments in right side of the instrument panel. Oil is replenished through the lid in the upper part of the oil reservoir.

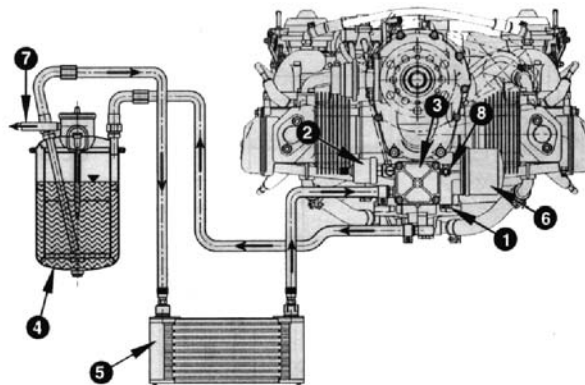

**Figure 7-3** Scheme of engine lubrication system

### 7.11.6 Engine intake system

Engine intake system ensures delivery of sufficient air into engine. Air is taken into the engine through openings on the engine covers through the air filters.

The intake system can be equipped with carburettor heating system. Hot air from the heat exchanger (located on the exhaust collector) is taken to the mixing chamber.

Amount of in-taken hot air is regulated by flaps in mixing chamber inlets. Flaps are controlled by the **CARBURETTOR PREHEATER** knob on the instrument panel.

### 7.11.7 Ignition system

The engine is equipped with the double contactless ignition system. Each ignition circuit has own source of energy, control unit, 2 ignition coils and 4 spark plugs. It is fully autonomous on the other circuit of accumulator. High voltage current is distributed to the spark plugs through high-voltage cables. Ignition sequence of individual engine cylinders:

Ignition circuits are controlled by the ignition switch on the instrument panel.

Positions of ignition switch:

- |              |   |
|--------------|---|
| <b>OFF</b>   | engine ignition is off                                  |
| <b>R</b>     | only ignition circuit B is on                           |
| <b>L</b>     | only ignition circuit A is on                           |
| <b>BOTH</b>  | both circuits are on                                    |
| <b>START</b> | both circuits are on and starter is cranking the engine |



## 7.12 Fuel system

Fuel system serves for keeping fuel in the airplane and its feeding to the engine. Fuel system of SPORTSTAR airplane is composed of integral fuel tanks, fuel line, fuel selector, fuel filter, mechanical fuel pump – located on the engine (auxiliary electrical fuel pump can be installed), distribution pipe of fuel with, return branch of fuel, fuel gauges and fuel tanks draining valves.

### 7.12.1 Fuel tanks


Fuel is contained in the wing integral tanks having volume 60 l (15.85 U.S. gallons) each. Each tank is fitted with air venting (output is under the wing tip) and draining valve on the bottom side of the wing. Fuel is led from the tanks through the hoses to the fuel selector located on a central console under the instrument panel and then through a fuel filter to the engine pump and carburetors. Fuel return hose goes from the fuel pump into the left tank, which is due to considered as a “primary” tank. See figure 7–4 for Scheme of fuel system.

### 7.12.2 Fuel selector

The fuel selector serves for tank selection and fuel delivery interruption in case of engine fire or long parking of airplane.

To move selector from OFF (closed) position it necessary pull the safety button on the fuel selector, turn the handle from the OFF position to the left and then release safety button. Now the handle can be freely moved between LEFT and RIGHT position. Safety button prevents unintentionally switch the selector to OFF position.

To move selector to OFF (closed) position it is necessary pull the safety button on the fuel selector, turn the handle to the OFF position and then release safety button. Now the handle is blocked in the OFF position. Safety button prevents unintentionally switch the selector from the OFF position during parking.

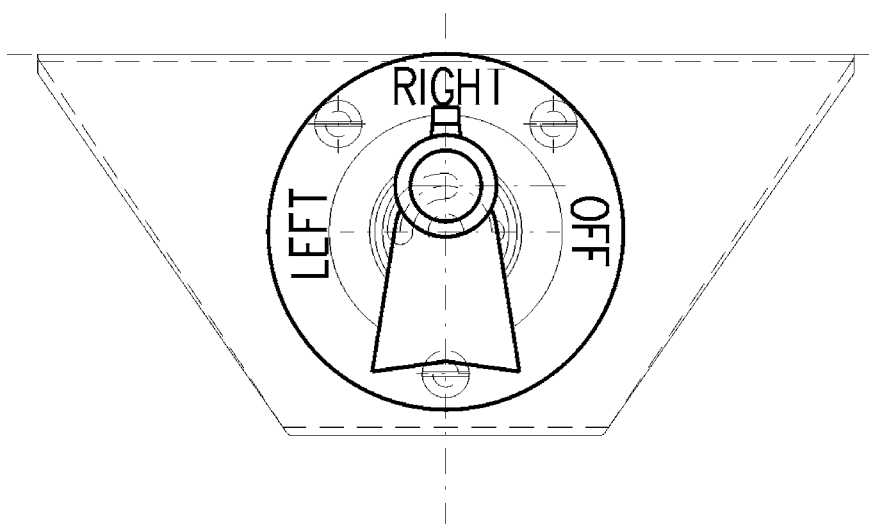



#### 7.12.3 Fuel filter


The fuel filter separates all mechanical impurities from fuel. The fuel filter is located in the cockpit on the left airframe panel.

#### 7.12.4 Indication of fuel quantity

Fuel quantity is measured by a float fuel gauge transmitter in each tank and indicated on fuel gauge on the instrument panel. LH fuel gauges indicates fuel quantity in the left (primary) tank, RH indicator in the right tank. True fuel quantity is indicated only on ground and in level flight and it takes approx. 2 minutes to level fuel after transition from climb/descent.

#### 7.12.5 Fuel tank draining

Draining of the fuel tank is specified in chapter 8.5 in page 8–7.

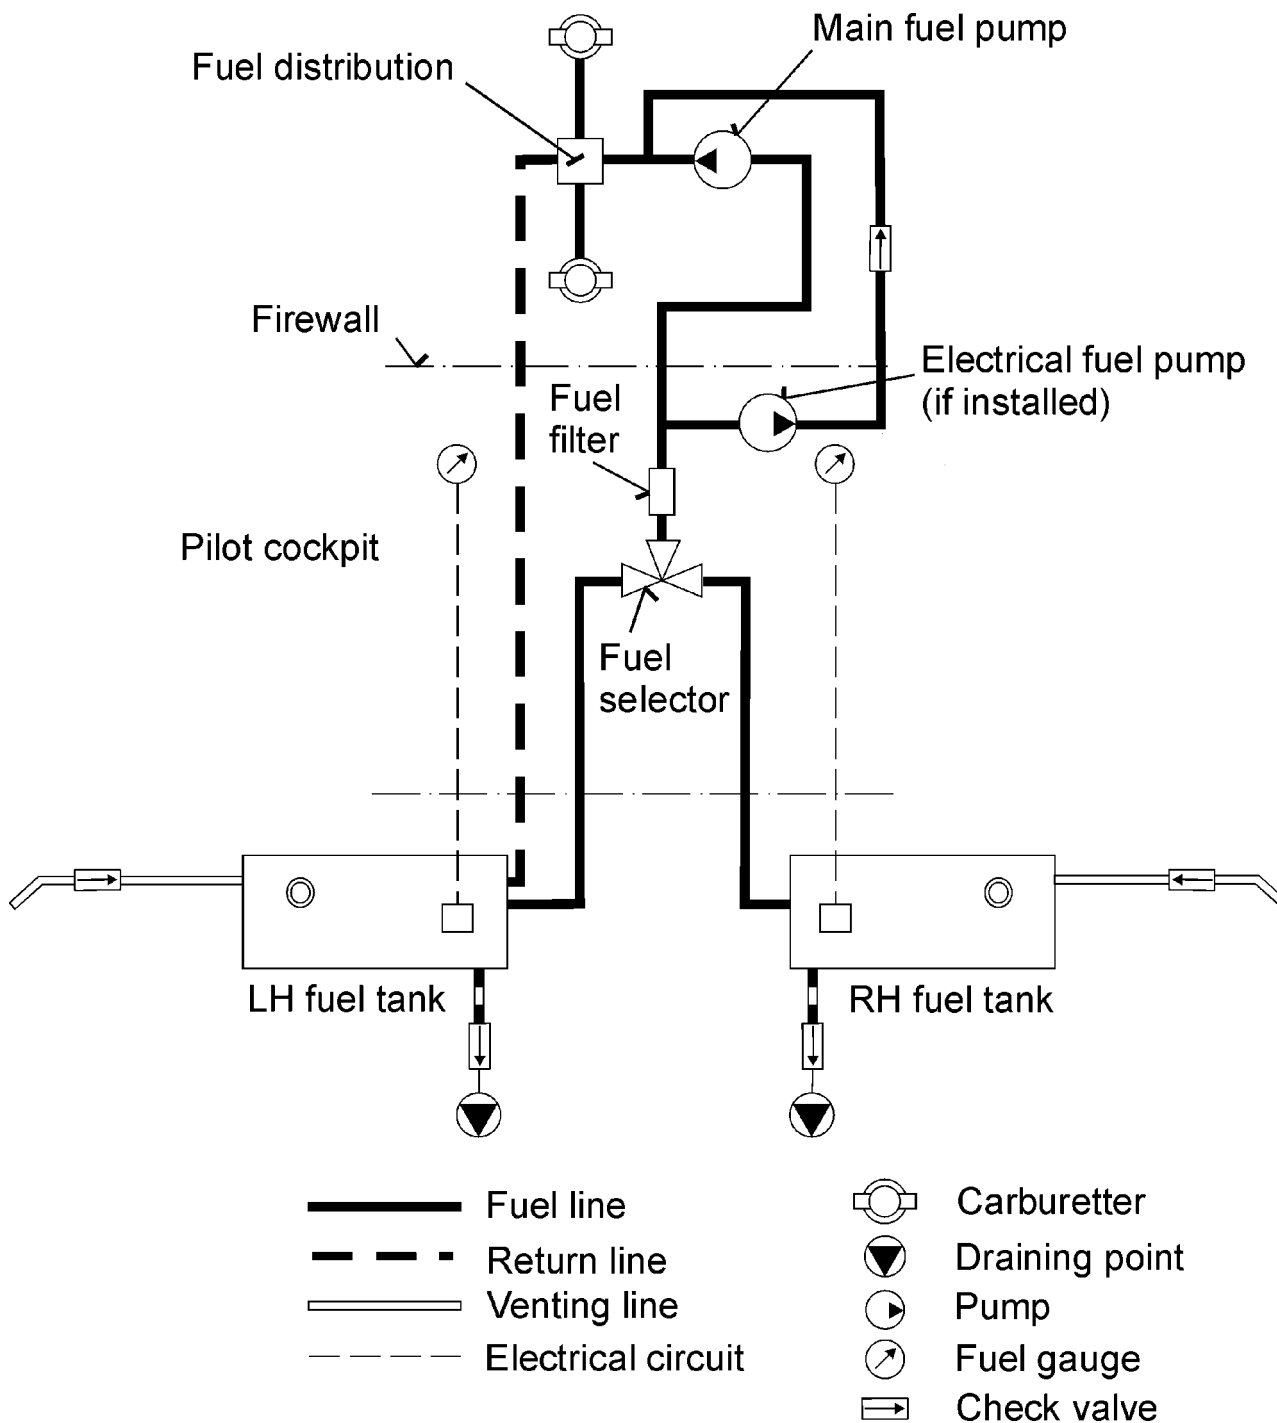

**Figure 7-4** Scheme of fuel system



### 7.13 Electrical system

The airplane is equipped with 14 V DC electrical installation. A generator with power of 250 W is the primary source of electrical energy. The secondary source of energy is the accumulator 12V/16Ah that is located in the engine compartment on the fire wall. It is used for engine starting and in case of generator failure as an emergency source of energy and also serves as the smoothing filter of power system.

DC voltage is distributed to individual systems by main busbar. Each system is protected by circuit breaker. If overloading of any of the circuits occurs, then the circuit breaker is pulled out. Circuit breakers are listed in the Aircraft Maintenance and Inspection Procedures.

After switching **MASTER SWITCH** on and by turning the ignition key to **START** position the starter is activated. The starter is power supplied from the accumulator before engine start. After engine has been started and idle RPM reached, generator starts supplying current into electrical network.

#### 7.13.1 Lighting

Airplane can be equipped with a external lighting.

External lighting can be composed of position lights and anticollision beacons which are located in wing tip and landing headlight which is located in left wing leading edge or in the lower engine cowling. Position lights are switched by **POS. LIGHTS** switch and anticollision beacon by **BEACON** switch. Landing headlight is switched by **LDG LIGHT** (or **REFLECTOR**) switch.

#### 7.13.2 Electrical system scheme

See Aircraft Maintenance and Inspection Procedures.



### 7.14 Pitot–static system

Pitot–static tube for sensing static and total pressure is located under the left half of the wing. Total pressure is sensed through the opening in the Pitot–static tube face. Static pressure is sensed through openings on the tube circumference. System of pressure distribution to individual instruments are made by means of flexible plastic hoses. Transparent draining reservoirs are located in the pressure branch of static and total pressure on the left fuselage side by the wing leading edge.

Static pressure is led to altimeter, airspeed indicator, variometer and altitude encoder (if installed). Total pressure is led only to the airspeed indicator.

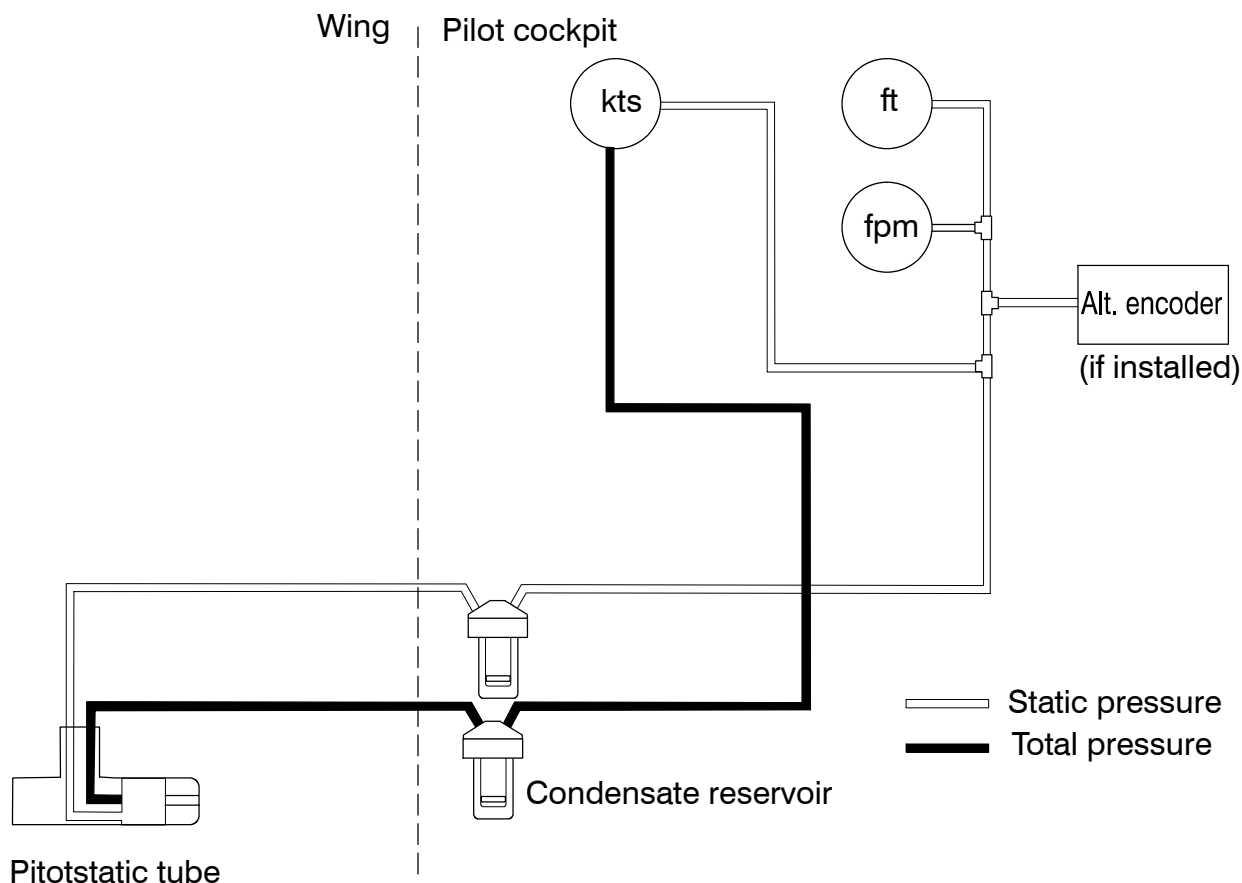


Figure 7-5 Scheme of pitot–static system



## **7.15 Supplementary equipment**

### **7.15.1 Ventilation and heating system**

Cockpit ventilation is ensured by two sliding windows located on the tilting canopy.

Cockpit heating is ensured by hot air from the heat exchanger. The heat exchanger is located on the exhaust pipe collector. Air from outside atmosphere is warmed up in the exhaust pipe collector and delivered through air hoses into the cockpit.

Hot air quantity is regulated by the flap which is controlled by the **HOT AIR** knob on the instrument panel. The cockpit heating system can be equipped with a wind-shield blowing system.

## **7.16 Navigation and communication equipment**

Description of operation of navigation and communication equipment see section 9 – Supplements.



## **CONTENTS**

### **8. AIRPLANE HANDLING, SERVICING AND MAINTENANCE**

<b>8.1</b>	<b>Introduction</b> .....	<b>8-3</b>
<b>8.2</b>	<b>Airplane inspection period</b> .....	<b>8-4</b>
<b>8.3</b>	<b>Modifications or airplane repairs</b> .....	<b>8-5</b>
<b>8.4</b>	<b>Road transport</b> .....	<b>8-5</b>
8.4.1	Airplane towing .....	8-5
8.4.2	Airplane parking .....	8-6
8.4.3	Airplane anchoring .....	8-6
8.4.4	Airplane jacking .....	8-7
8.4.5	Levelling .....	8-7
8.4.6	Road transport .....	8-7
<b>8.5</b>	<b>Draining of fuel tank</b> .....	<b>8-7</b>
<b>8.6</b>	<b>Cleaning and care</b> .....	<b>8-8</b>

**Section 8**

*Airplane Handling,  
Servicing and Maintenance*

**SPORTSTAR**

**AIRCRAFT OPERATING INSTRUCTIONS**



---

Doc. No. S2006AOIUS

---

Intentionally left blank



## 8.1 Introduction

This section includes the procedures for airplane handling, maintenance and operation recommended by the manufacturer.

It is necessary to follow the set-down lubrication plan, scope and periodicity of preventive maintenance depending on climatic and flight conditions according to the Aircraft Maintenance and Inspection Procedures of SPORTSTAR Light Sport Aircraft

Airplane owner should be in a permanent touch with the manufacturer, either directly or through the network of business representatives, which enables him to get the newest information concerning airplane operation, handling and maintenance. The manufacturer distributes this information to users through Service bulletins (Mandatory bulletins), Information bulletins (letters) and further instructions.

Mandatory bulletins are especially important for keeping up airworthiness and the manufacturer considers them mandatory although they do not come into effect before Airworthiness Directive is issued by aviation authority of user's country.

All correspondence with the airplane manufacturer, distributor or service center must contain **the airplane serial number**. The airplane serial number is shown on the title sheet of this Instructions and on the production plate behind the rest of pilot seats.

The manufacturer delivers along with aircraft SPORTSTAR the "Aircraft Operating Instructions (AOI)" and the "Aircraft Maintenance and Inspection Procedures (AMIP)".

Qualification requirements to perform maintenance and repairs are mentioned in the AMIP – item 4.1.1.

### **Owner/Operator Responsibilities:**

- Each owner/operator of an LSA airplane shall read and comply with the maintenance and continued airworthiness information and instructions provided by the manufacturer.
- Each owner/operator of an LSA airplane shall be responsible for providing the manufacturer with current contact information where the manufacturer may send the owner/operator supplemental notification bulletins.
- The owner/operator of an LSA airplane shall be responsible for notifying the manufacturer of any safety of flight issue or significant service difficulty upon discovery.
- The owner/operator of an LSA airplane shall be responsible for complying with all manufacturer issued notices of corrective action and for complying with all

## Section 8

Airplane Handling,  
Servicing and Maintenance

# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS



Doc. No. S2006AOIUS

applicable aviation authority regulations in regard to maintaining the airworthiness of the LSA airplane.

- An owner of an LSA airplane shall ensure that any needed corrective action must be completed as specified in a notice, or by the next scheduled annual inspection.
- Should an owner/operator not comply with any mandatory service requirement, the LSA airplane shall be considered not in compliance with applicable ASTM Standards and may be subject to regulatory action by the presiding aviation authority.

### 8.2 Airplane inspection period

Periodical inspections and reviews of airplane must be carried out at the latest in the following intervals:

- after **first**  $25 \pm 2$  hours of operation
- after every  $50 \pm 3$  hours of operation
- after every  $100 \pm 5$  hours of operation
- annual inspection

Details on periodical inspections are provided in the Aircraft Maintenance and Inspection Procedures of SPORTSTAR.

Refer to the Rotax 912 Operator's Manual for engine maintenance.

Refer to the Propeller Maintenance Manual for propeller maintenance.



### **8.3 Modifications or airplane repairs**

All airplane repairs and modifications of airplane must be carried out by qualified personnel in an approved service center ( see AMIP – item 4.1.1.).

Before any repairs/modification is made to the aircraft, consult the Civil aviation authority of the country in which the airplane is registered to assess effect of the repair/modification on the airworthiness.

Basic repairs of airplane are described in the Aircraft Maintenance and Inspection Procedures of SPORTSTAR.

### **8.4 Road transport**

#### **8.4.1 Airplane towing**

It is possible to move the airplane on a short distance by holding the fuselage end in the position before the fin, eventually by holding the root part of wings.

The hand towing bar can be used for airplane relocation which will be fastened to the nose wheel axis.

To turn the airplane on the spot, push on the fuselage end part in the area before the fin, lift the nose wheel and turn the airplane in required direction.

<b>WARNING</b>
----------------

**SWITCH OFF IGNITION BEFORE GROUND HANDLING WITH THE AIRPLANE!**

<b>CAUTION</b>
----------------

AVOID EXCESSIVE PRESSURES ON THE AIRFRAME STRUCTURE, ESPECIALLY ON THE WING TIPS, HTU, VTU ETC.

WHEN HANDLING THE AIRPLANE BY MEANS OF THE TOWING BAR, PROPELLER BLADES MUST BE SET TO HORIZONTAL POSITION. MAXIMUM DEFLECTION OF THE NOSE WHEEL IS  $\pm 10^\circ$ .

AT MANUAL ENGINE STARTING GRASP THE PROPELLER BLADE AREA, I.E. NOT ONLY PROPELLER EDGE.

## Section 8

Airplane Handling,  
Servicing and Maintenance

# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS



Doc. No. S2006AOIUS

### 8.4.2 Airplane parking

It is the most suitable solution to place the airplane into a hangar possibly into another covered room with stable temperature, good venting, low humidity and dust-free environment. In case of parking out of the hangar it is necessary to anchor the airplane and at long-term parking to cover the canopy, possibly the whole airplane with suitable tarpaulins.

### 8.4.3 Airplane anchoring

The airplane is anchored at parking out of hangar after termination of flight day or according to need. Anchoring of the airplane is necessary for its protection against possible damage, caused by wings and gusts. For this purpose the airplane is equipped with fixing eyes on the lower side of wings.

Procedure:

1. Check of fuel selector, off-position of all switches, ignition and master switch.
2. Lock manual control, e.g. by using safety belts
3. Close vent windows
4. Close and lock the cockpit canopy
5. Anchor the airplane to the ground by means of cables pulled through fixing eyes which are located on the lower side of wings. Further it is necessary to anchor the nose landing gear.

#### NOTE

In case that long-term airplane anchoring is supposed, namely in winter period, it is suitable to cover the canopy, eventually the whole airplane by appropriate tarpaulins which must be properly secured to the airplane structure.



#### 8.4.4 Airplane jacking

Airplane jacking presents no big difficulties due to relatively low airplane empty weight and can be performed by two persons.

First, it is necessary to prepare two suitable rests which will support the airplane.

The airplane can be jacked in the following way:

- by pushing from the above to the fuselage rear part in the position before the fin the front part of fuselage can be jacked and subsequently supported under the fire wall.
- Rear part of fuselage can be slightly jacked only by grasping in the position near the auxiliary skid and by pushing from below and then the lower part of fuselage can be supported by the rest located in the area of the skid.
- Wings can be jacked by pushing on the wing from below in the area of the main spar. It is necessary to avoid jacking by grasping the wing tip.

#### 8.4.5 Levelling

Levelling procedure is described in the Maintenance manual for SPORTSTAR airplane.

#### 8.4.6 Road transport

The airplane can be transported on communication after its loading on an appropriate trail. It is necessary to dismount wings. The airplane must be secured against possible movement. This way you will preclude possible damage to the airplane.

### 8.5 Draining of fuel tank

Draining should be done prior to first flight each day.

There is a drain valve of each wing tank located on its bottom.

Procedure:

1. Put a transparent cup under the drain valve.
2. Using screwdriver (or appropriate jig) press and turn drain valve counterclockwise to open it.
3. Drain required quantity of fuel.

#### **NOTE**

Draining serves to elimination of impurities and deposits from the fuel. Drain until clean fuel flows from the drain valve.

4. Using screwdriver (or appropriate jig) turn drain valve clockwise to close it.
5. Repeat procedure for the opposite tank.

## Section 8

Airplane Handling,  
Servicing and Maintenance

# SPORTSTAR

## AIRCRAFT OPERATING INSTRUCTIONS



Doc. No. S2006AOIUS

### 8.6 Cleaning and care

Always use appropriate cleaning agents when cleaning airplane surface. Residuum of oil and fat can be removed form the airplane surface (excluding the canopy) by suitable detergents, possibly by petrol.

The canopy only to be cleaned by washing with ample stream of tepid water with addition of appropriate detergents. Use soft rag, sponge or wash leather. Use suitable polishing agent after wiping rests of water.

#### CAUTION

NEVER DRY – CLEAN THE CANOPY AND NEVER USE  
PETROL NOR CHEMICAL SOLVENTS!

Coating, upholstery and carpets in the cocpit can be removed from the cocpit, brushed and, if need be, cleaned with warm water with addition of appropriate detergent. Dry up upholstery after doing this .



## 9. Supplements

### 9.1 Introduction

This section contains the appropriate supplements necessary to safely and efficiently operate the airplane when equipped with various optional systems and equipment not provided with the standard airplane.

### 9.2 List of inserted supplements

Instal.	Date	Doc. No.	Title of inserted supplement
	Jan 15/06	S2006AOIUSS01	Transceiver KY97A
	Jan 15/06	S2006AOIUSS02	Intercom PM 1000
	Jan 15/06	S2006AOIUSS03	Transponder KT76A
	Jan 15/06	S2006AOIUSS04	Airplane description of S/N
	Jan 15/06	S2006AOIUSS05	GPS/COMM receiver KLX 135
	Jan 15/06	S2006AOIUSS06	Flight clock LC-2
	Jan 15/06	S2006AOIUSS07	Transceiver FILSER ATR 600
	Jan 15/06	S2006AOIUSS08	GPS/NAV/COMM receiver GARMIN GNS 430/430A
	Jan 15/06	S2006AOIUSS09	Transponder ATC GARMIN GTX 327
	Jan 15/06	S2006AOIUSS010	Intercom PCD7100-I (PS ENGINEERING INCORPORATED)
	Jan 15/06	S2006AOIUSS011	Rocket activated parachute rescue system Magnum Speed Soft 650
	Jan 15/06	S2006AOIUSS012	Horizon RCA 26
	Jan 15/06	S2006AOIUSS013	Float operation CZAW 1150
	Jan 15/06	S2006AOIUSS014	Horizon LUN 1202
	Jan 15/06	S2006AOIUSS015	Towing gear
	Jan 15/06	S2006AOIUSS016	Pitot tube heating
	Jan 15/06	S2006AOIUSS017	Emergency Locator Transmitter AK-450
-	-	S2006AOIUSS018	Not used
	Jan 15/06	S2006AOIUSS019	Stall warning system ACI type T1b



Instal.	Date	Doc. No.	Title of inserted supplement



**9.3 Supplements inserted**



Intentionally left blank